


GENERAL NOTES

- Anti-condensate heat values represent a door with no heat
- Light controls - occupancy sensors are required
 - Option 1: OEM Provided: Lighting controls (on/off) are standard unless otherwise specified
 - Option 2: End User Provided: Light controls should be based on occupancy sensors
- Light wattages below reflect 100% run time. To acquire DOE representation, reduce the light wattages by 42% at 75°F/55%RH
- 4' case length available in 120V R448A condensing unit configuration.
- 2, 3, 4, & 5 door lengths available in 208V R404A condensing unit configuration.



SHIPPING WEIGHT	
Case	Weight
JNRBHSA	---

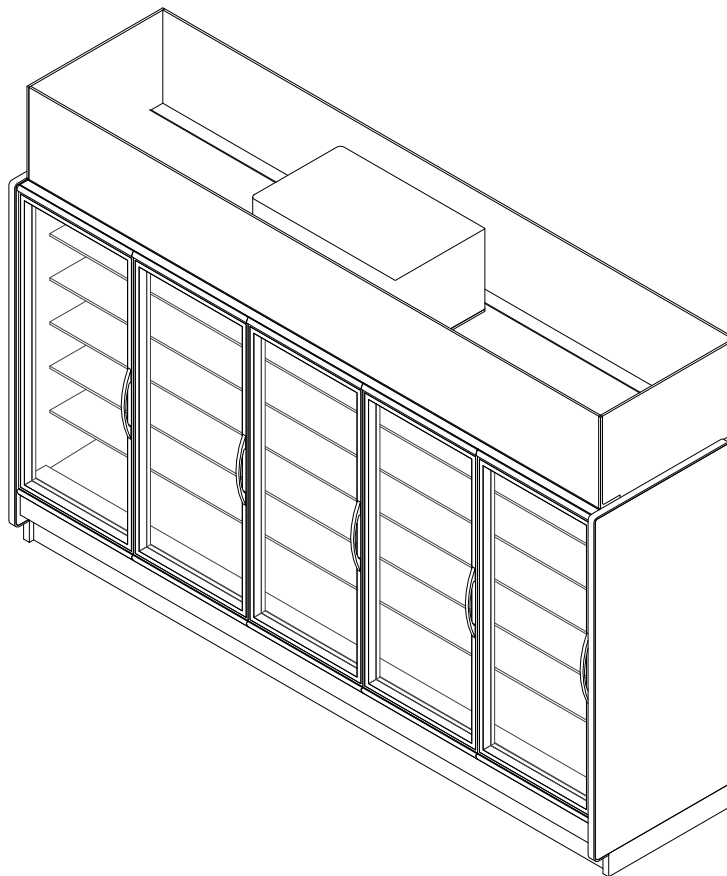

COMPONENT

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

JNRBHSA

Rev. Date	Rev. #	Rev. Title
5-14-19	7	NEW OFFERING
2-25-19	6	DATA UPDATE

SYSTEM REQUIREMENT				
Case Length	Volts	Phase	Frequency	Provided Overcurrent Protection
2 Door	208	1	60	20
3 Door	208	1	60	20
4 Door	208	1	60	20
5 Door	208	1	60	20
4'	120	1	60	15.8

*- 24 Hour Energy values includes evaporate fans, standard LEDs, anti-condensate heat & condensing unit

GUIDELINES AND CONTROL SETTINGS					
Case Length	Application	Superheat Set Point @ Bulb (°F)	Discharge Air (°F)	Set Point Differential (°F)	Discharge Air Velocity (FPM)
2 - 5 Door	Beverage	6 - 8	35	6	230
2 - 5 Door	Dairy	6 - 8	30	6	230
2 - 5 Door	Deli	6 - 8	29	6	230
4'	Beverage	6 - 8	32	---	183
4'	Dairy	6 - 8	31	---	183
4'	Deli	6 - 8	30	---	183

Case Length	24hr Energy Usage (kWh)*
	DOE
2 Door	6.09
3 Door	8.55
4 Door	10.20
5 Door	15.30
4'	5.35

CONDENSING UNIT DATA								
Case Length	Volts	Phase	Frequency	Horsepower	Running Load Amps (RLA) (Amps)	Locked Rotor Amps (LRA) (Amps)	Refrigerant	Lbs. of Refrigerant
2 Door	208	1	60	1/3	4.2	16.8	R404A	2.2
3 Door	208	1	60	1/3	4.2	16.8	R404A	2.6
4 Door	208	1	60	1/3	4.2	16.8	R404A	3.0
5 Door	208	1	60	1/3	5.3	26.5	R404A	3.5
4'	120	1	60	1/4	4.0	26.0	R448A	2.45

DEFROST CONTROLS				
Case Length	Defrosts Per Day	Run-Off Time (Min)	Fail-Safe (Min)	Termination Temp (F)
2 - 5 Door	2	0	46	44
4'	2	0	60	40

DEFROST SCHEDULE	
Defrosts Per Day	Time
2	12 a.m. - 12 p.m.

NOTES

- "---" indicates that this feature is not an option on this case model.
- Anti-condensate heat values represent a door with no heat.
- Listed discharge air velocity represents the average velocity at the peak of defrost.
- Temperature and defrost settings listed below are recommended start-up settings. Final operational settings may need to be adjusted for the store conditions in which the case operates.
- The recommended evaporator temperatures may need to be adjusted based on system setup, store conditions, etc. The minimum recommended evaporator temperature is 4°F below the listed evaporator temperature.




ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

JNRBHSA

Rev. Date	Rev. #	Rev. Title
5-14-19	7	NEW OFFERING
2-25-19	6	DATA UPDATE




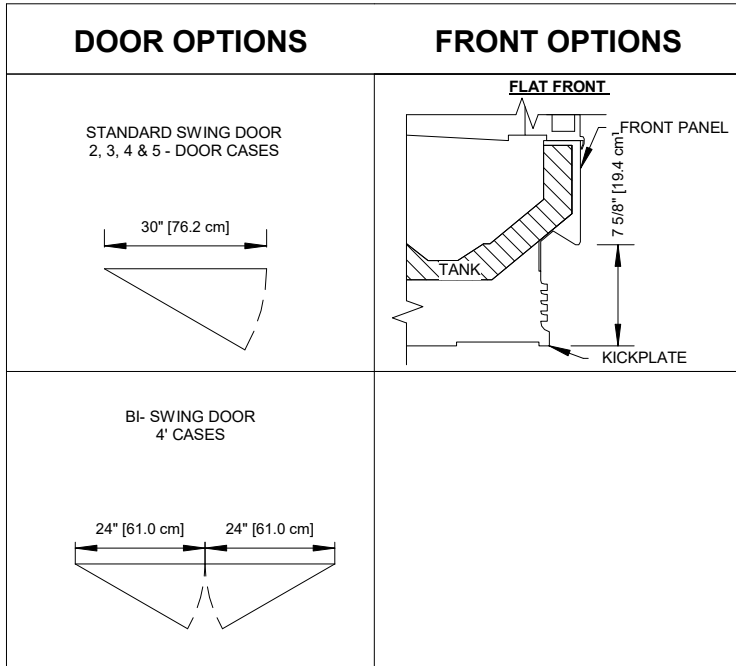

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

JNRBHSA

Rev. Date	Rev. #	Rev. Title
5-14-19	7	NEW OFFERING
2-25-19	6	DATA UPDATE

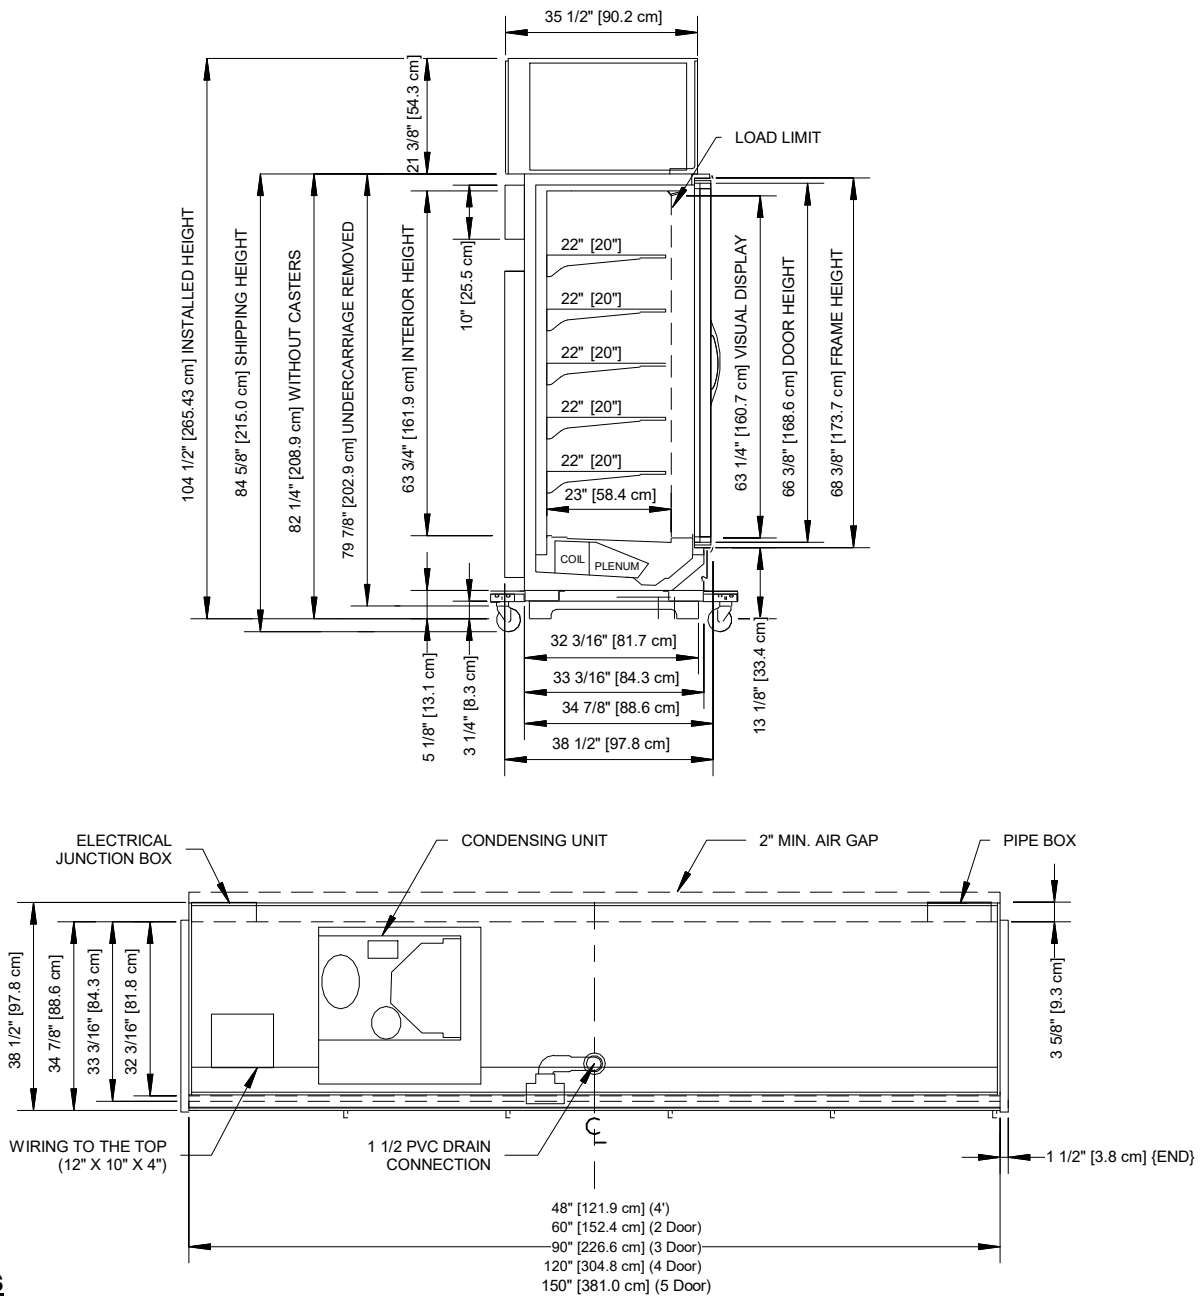

NOTES

- * : STUB-UP AREA.
- ** : RECOMMENDED STUB-UP CENTERLINE FOR ELECTRICAL AND HUB DRAINS.

- Specialized Base Frame:
 - Case fits through 80" doorway with shipping undercarriage removed.
 - 2" lifting brackets (installed) & 3.25" ship loose risers combine for 5" baseframe once installed.
 - Drain traps ship loose.
- Ends add approximately 1" to case height, 1/2" to the back & 1" to the front.



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

JNRBHSA

Rev. Date	Rev. #	Rev. Title
5-14-19	7	NEW OFFERING
2-25-19	6	DATA UPDATE

