


GENERAL NOTES

- For back-to-back configurations, customers are required to install separate current-limiting devices for each side of the case per the amperage values listed. (Current-limiting devices are available for purchase through Hillphoenix).
- Lighting control - occupancy sensors are required
 - Option 1: OEM Provided: OEM anti-condensate and lighting controls (on/off) are standard unless otherwise specified.
 - Option 2: End User Provided: Light controls should be based on occupancy sensors. Store level A/S control should be set to 30% minimum off time at 75°F/55%RH.



SHIPPING WEIGHT	
Case	Weight
ONRIZ	1000-2000 LBs

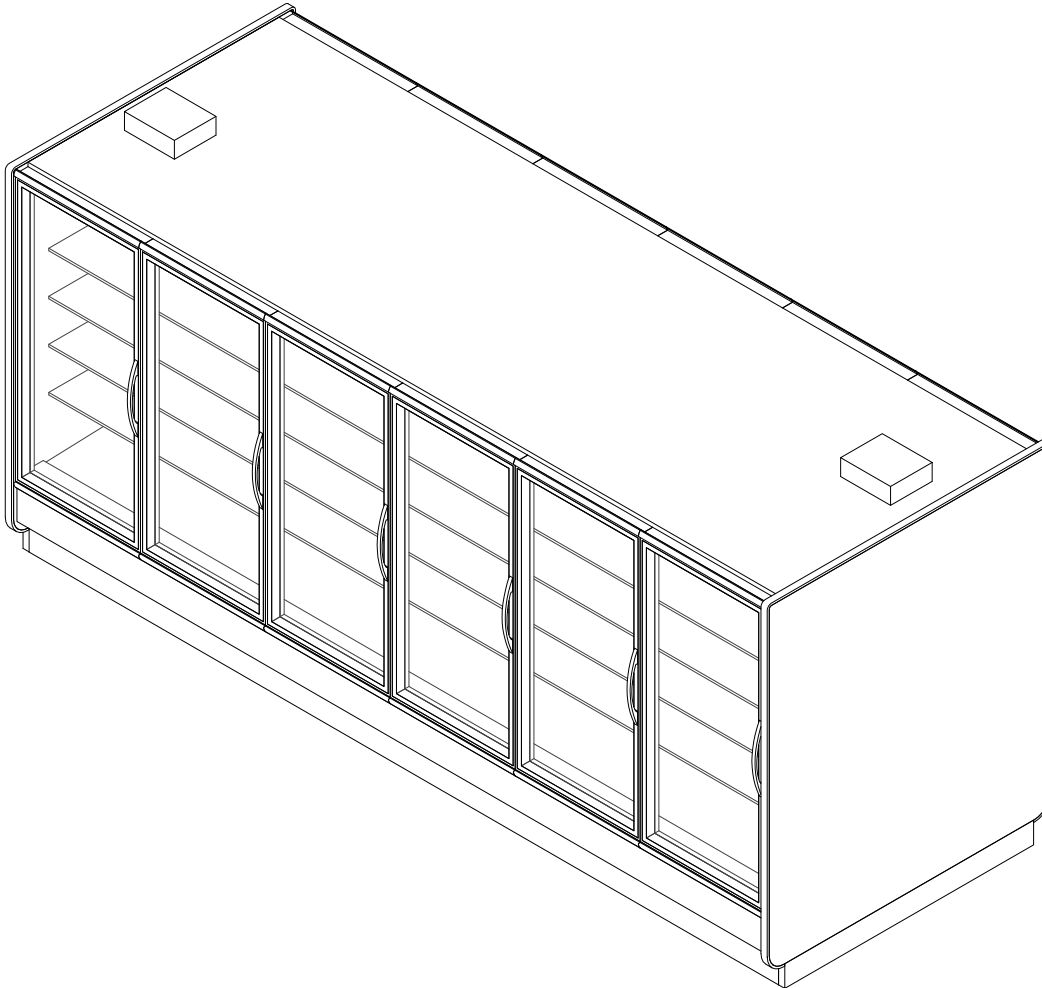

COMPONENT

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

ONRIZ

Rev Date:	Rev #	Revision Description:
4-17-18	2	NEW STANDARDS
12-1-17	1	DOE 2017

ELECTRICAL DATA - Single-Side													
Case Length	Fans Per Case	High Efficiency Fans		Tank Heater		Defrost Heaters (1 - Phase)				Defrost Heaters (3-Phase)			
		120 Volts		120 Volts		208 Volts		240 Volts		208 Volts		240 Volts	
		Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
2 Door	2	0.60	50	1.30	152	7.50	1552	8.60	2068	6.50	1552	7.50	2068
3 Door	3	1.00	75	1.50	171	10.90	2274	12.60	3018	9.50	2274	10.90	3018
4 Door	4	1.30	100	1.90	226	14.30	2984	16.60	3992	12.40	2984	14.40	3992
5 Door	5	1.60	125	2.30	275	17.50	3640	20.20	4840	15.10	3640	17.40	4840
6 Door	6	1.90	150	2.70	320	20.30	4224	23.40	5624	17.60	4224	20.30	5624

Back-To-Back													
Case Length	Fans Per Case	High Efficiency Fans		Tank Heater		Defrost Heaters (1-Phase)				Defrost Heater (3-Phase)			
		120 Volts		120 Volts		208 Volts		240 Volts		208 Volts		240 Volts	
		Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
4 Door	4	1.20	100	2.60	304	15.0	3104	17.20	4136	13.00	3104	15.00	4136
6 Door	6	2.00	150	3.00	342	21.8	4548	25.20	6036	19.00	4548	21.80	6036
8 Door	8	2.60	200	3.80	452	28.6	5968	33.20	7984	24.80	5968	28.80	7984
10 Door	10	3.20	250	4.60	550	35.0	7280	40.40	9680	30.20	7280	34.80	9680
12 Door	12	3.80	300	5.40	640	40.6	8448	46.80	11248	35.20	8448	40.60	11248

LIGHTING DATA - Single-Side					
Case Length	Door Size	OP45		Optimax Pro 24 LO	
		120 V		120 V	
		Amps	Watts	Amps	Watts
2 Door	30"	0.36	43.1	0.31	36.8
3 Door	30"	0.54	65.2	0.46	54.8
4 Door	30"	0.73	87.3	0.61	72.8
5 Door	30"	0.91	109.4	0.76	90.8
6 Door	30"	1.10	131.5	0.91	108.8

LIGHTING DATA - Back-to-Back					
Case Length	Door Size	OP45		Optimax Pro 24 LO	
		120 V		120 V	
		Amps	Watts	Amps	Watts
4 Door	30"	0.72	86.2	0.62	73.6
6 Door	30"	1.08	130.4	0.92	109.6
8 Door	30"	1.46	174.6	1.22	145.6
10 Door	30"	1.82	218.8	1.52	181.6
12 Door	30"	2.20	263	1.82	218.6

GUIDELINES & CONTROL DATA							
Application	Door	BTUH/Door		Superheat Set Point @ Bulb (°F)	Evaporator (°F)	Discharge Air (°F)	Discharge Air Velocity (FPM)
		Conventional	Parallel				
Frozen	Heated	891	866	3 - 5	-7	-1	400
Frozen	Low E	855	831	3 - 5	-7	-1	400
Ice Cream	Heated	928	902	3 - 5	-15	-8	400
Ice Cream	Low E	873	848	3 - 5	-15	-8	400



ONRIZ

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

Rev Date:	Rev #	Revision Description:
4-17-18	2	NEW STANDARDS
12-1-17	1	DOE 2017



ANTI CONDENSATE DATA- Single - Side											
Case Length	Door Size	Individual Circuits									
		I90 Doors				ELMD, ELMH Doors				Door Frame	
		Heated Option		Low E Option		Heated Option		Low E Option		101 - LE	
		120 V		120 V		120 V		120 V		120 V	
		Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
2 Door	30"	0.53	63	0.32	38	0.59	71	0.35	42	1.19	143
3 Door	30"	0.79	95	0.48	57	0.89	107	0.53	63	1.67	200
4 Door	30"	1.05	126	0.63	76	1.18	142	0.70	84	2.18	262
5 Door	30"	1.32	158	0.79	95	1.48	178	0.88	105	2.64	317
6 Door	30"	1.58	190	0.95	114	1.78	213	1.05	126	3.13	376

ANTI CONDENSATE DATA- Back-to-Back											
Case Length	Door Size	I90 Doors				ELMD, ELMH Doors				Door Frame	
		Heated Option		Low E Option		Heated Option		Low E Option		101-LE	
		120 V		120 V		120 V		120 V		120 V	
		Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
		4 Door	30"	1.06	126	0.64	76	1.18	142	0.70	84
6 Door	30"	1.58	190	0.96	114	1.78	214	1.06	126	3.34	400
8 Door	30"	2.10	252	1.26	152	2.36	284	1.40	168	4.36	524
10 Door	30"	2.64	316	1.58	190	2.96	356	1.76	210	5.28	634
12 Door	30"	3.16	380	1.90	228	3.56	426	2.10	252	6.26	752

DEFROST CONTROLS					
Defrosts Per Day	Run-Off Time (Min)	Electric Defrost		Hot Gas Defrost	
		Fail-Safe (Min)	Termination Temp (°F)	Fail-Safe (Min)	Termination Temp (°F)
1	13 - 15	46	50	24	73

NOTES

- "---" indicates that this feature is not an option on this case model.
- Drain heater and fan motors share the same circuit (separate cycles). Electrical circuits must be properly sized to accommodate the higher current draw of the drain heater.
- Defrost heater 3-phase load is unbalanced.
- 3-phase defrost heater data listed represents the maximum amps per phase.
- Anti-condensate heat values for Low E doors represent a door with no heat on the glass.
- Listed discharge air velocity represents the average velocity at the peak of defrost.
- Temperature and defrost settings listed above are recommended start-up settings. Final operational settings may need to be adjusted for the store conditions in which the case operates.
- The recommended evaporator temperatures may need to be adjusted based on system setup, store conditions, etc. The minimum recommended evaporator temperature is 4°F below the listed evaporator temperature.
- No run-off time required for electrical defrost.
- Typical electric defrost time is 20 minutes when ambient conditions are 75°F / 55%RH.
- Low energy doors (no heat on the glass) do not require anti-condensate or lighting controls. Frame A/S heat is cycled off during defrost cycles.
- Heated doors (heat on the glass) require anti-condensate and lighting controls. Frame A/S heat is cycled off during defrost cycles.
- Data listed is for Optimax Radiant and low power Optimax Pro (high power available). For other lighting options please contact your sales representative.
- Light and A/S wattages above reflect 100% run time. To acquire DOE representation, reduce light wattage by 42% at 75°F/55%RH.







ONRIZ

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

Rev Date:	Rev #	Revision Description:
4-17-18	2	NEW STANDARDS
12-1-17	1	DOE 2017

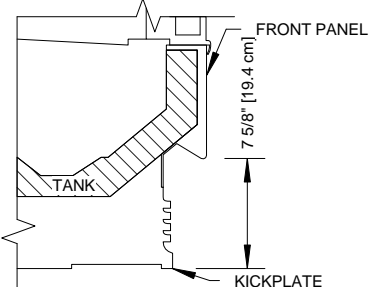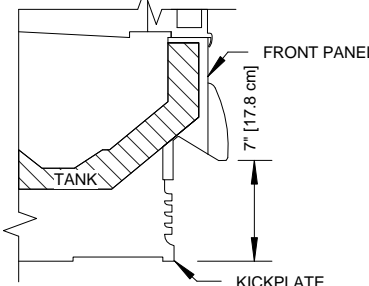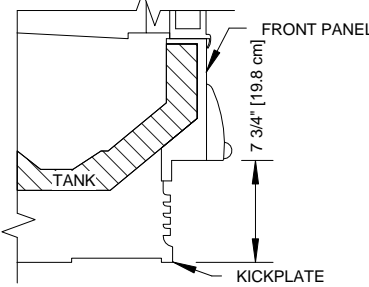

DOOR OPTIONS	FRONT OPTIONS
<p>STANDARD SWING DOOR 2,3,4,5 - DOOR CASES</p> 	<p>FLAT FRONT (O SERIES)</p> 
	<p>STREAMLINE BUMPER</p> 
	<p>HALF BUMPER</p> 





COMPONENT

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

ONRIZ

Rev Date:	Rev #	Revision Description:
4-17-18	2	NEW STANDARDS
12-1-17	1	DOE 2017

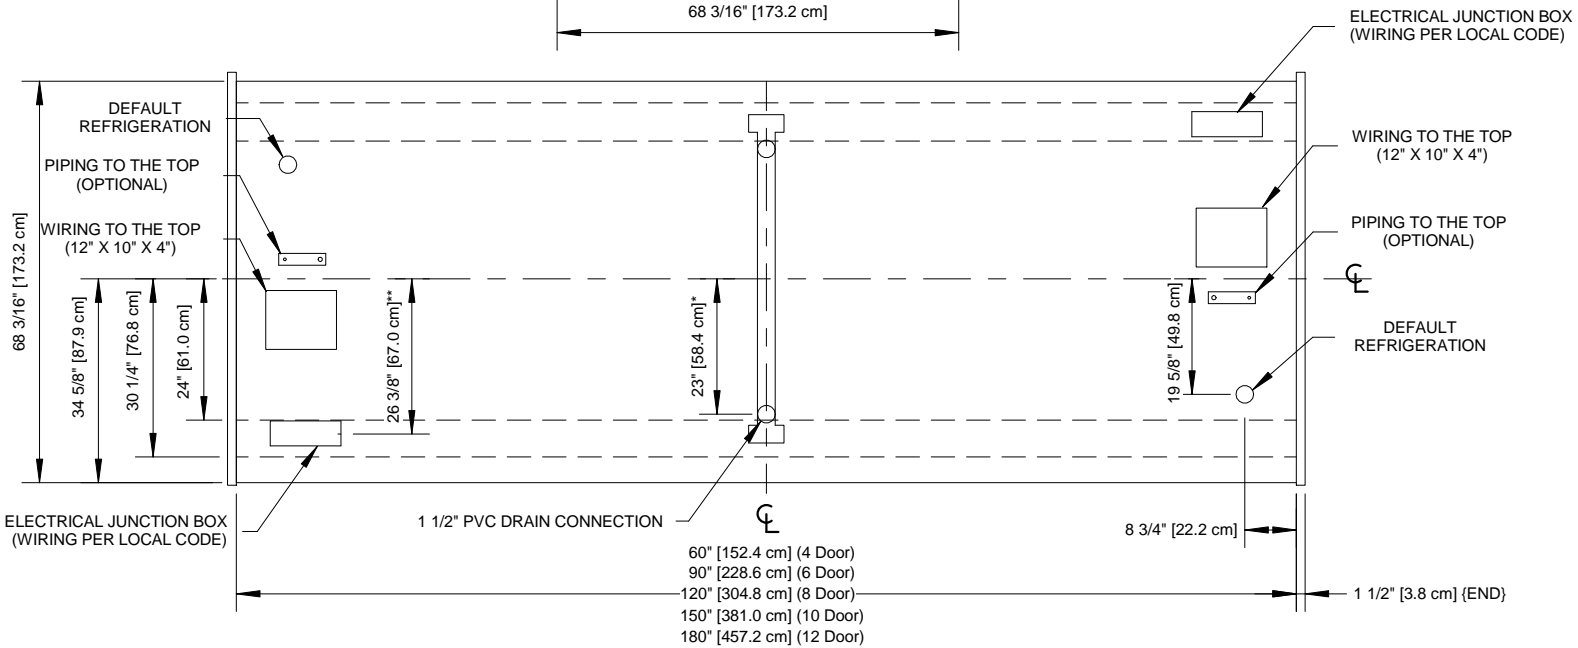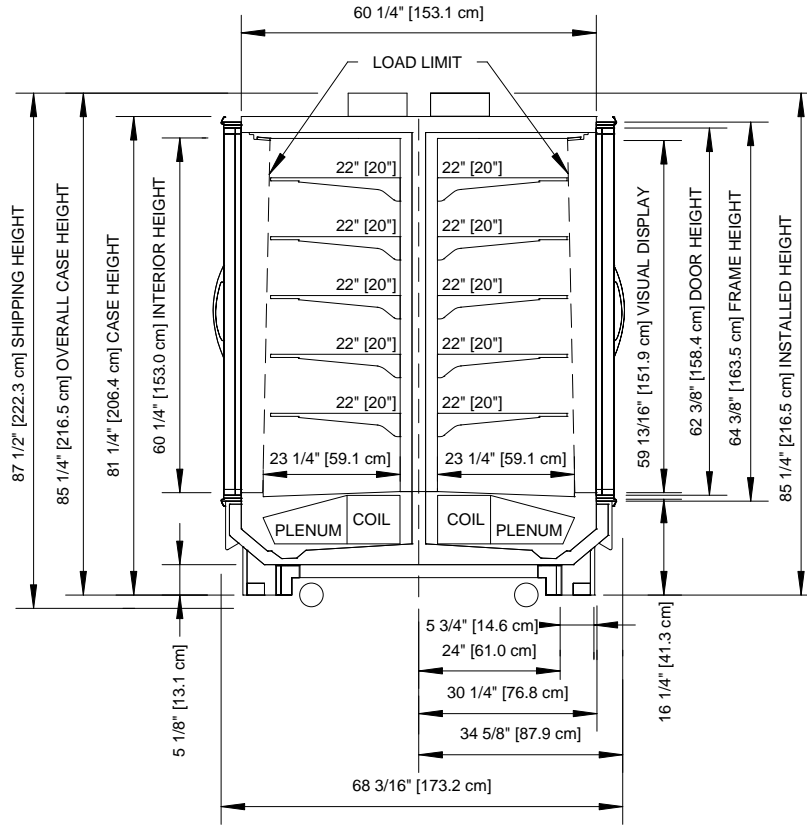

NOTES

- * : STUB-UP AREA.
- ** : RECOMMENDED STUB-UP CENTERLINE FOR ELECTRICAL AND HUB DRAINS.

- Ends add approximately 1" to case height, 1/2" to the back & 1" to the front.
- Wiring adds approximately 4 inches to case height.



ONRIZ

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

Rev Date:	Rev #	Revision Description:
4-17-18	2	NEW STANDARDS
12-1-17	1	DOE 2017