


GENERAL NOTES

- For back-to-back configurations, customers are required to install separate current-limiting devices for each side of the case per the amperage values listed. (Current-limiting devices are available for purchase through Hillphoenix).
- Lighting controls - occupancy sensors are required.
 - Option 1: OEM Provided: OEM anti-condensate and lighting controls (on/off) are standard unless otherwise specified.
 - Option 2: End User Provided: Light controls should be based on occupancy sensors. Store level A/S control should be set to 30% minimum off time at 75°F/55%RH.



SHIPPING WEIGHT	
Case	Weight
ORIZ	1000-2000 LBs

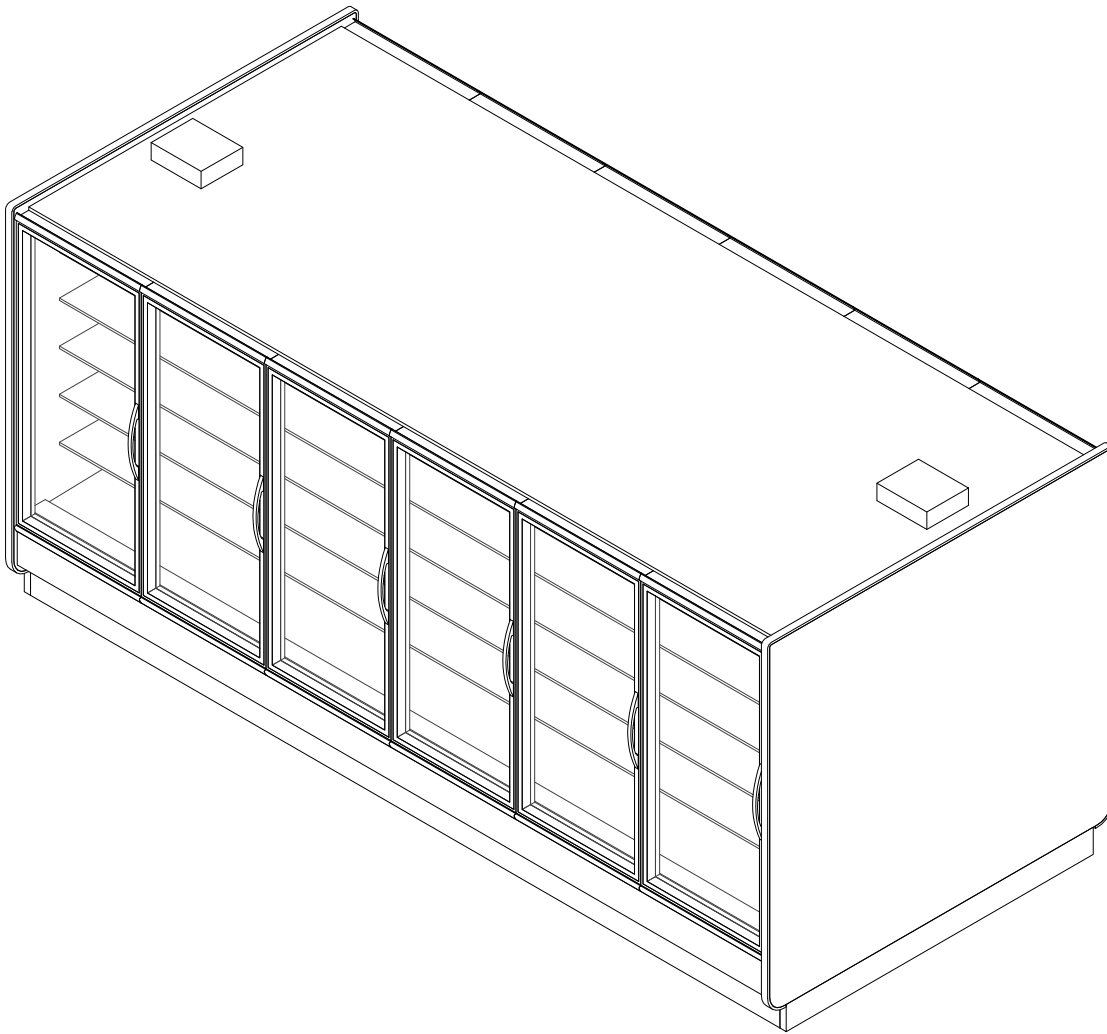

COMPONENT

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

ORIZ

Rev Date:	Rev #	Revision Description:
04-23-18	2	NEW STANDARDS
12-1-17	1	DOE 2017

ELECTRICAL DATA Single-Side

Case Length	Fans Per Case	High Efficiency Fans		Drain Heater		Defrost Heaters (1-Phase)				Defrost Heaters (3-Phase)			
		120 Volts		120 Volts		208 Volts		240 Volts		208 Volts		240 Volts	
		Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
2 Door	2	0.6	50	1.3	152	7.5	1552	8.6	2068	6.5	1552	7.5	2068
3 Door	3	1	75	1.5	171	10.9	2274	12.6	3018	9.5	2274	10.9	3018
4 Door	4	1.3	100	1.9	226	14.3	2984	16.6	3992	12.4	2984	14.4	3992
5 Door	5	1.6	125	2.3	275	17.5	3640	20.2	4840	15.1	3640	17.4	4840
6 Door	6	1.9	150	2.7	320	20.3	4224	23.4	5624	17.6	4224	20.3	5624

Back-To-Back

Case Length	Fans Per Case	High Efficiency Fans		Drain Heater		Defrost Heaters (1-Phase)				Defrost Heater (3-Phase)			
		120 Volts		120 Volts		208 Volts		240 Volts		208 Volts		240 Volts	
		Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
4 Door	4	1.2	100	2.6	304	15.0	3104	17.2	4136	13	3104	15	4136
6 Door	6	2	150	3	342	21.8	4548	25.2	6036	19	4548	21.8	6036
8 Door	8	2.6	200	3.8	452	28.6	5968	33.2	7984	24.8	5968	28.8	7984
10 Door	10	3.2	250	4.6	550	35.0	7280	40.4	9680	30.2	7280	34.8	9680
12 Door	12	3.8	300	5.4	640	40.6	8448	46.8	11248	35.2	8448	40.6	11248

LIGHTING DATA Single-Side

Case Length	Door Size	OP45		Optimax Pro 24 Low	
		120 Volts		120 Volts	
		Amps	Watts	Amps	Watts
2 Door	30"	0.36	43.1	0.31	36.8
3 Door	30"	0.54	65.2	0.46	54.8
4 Door	30"	0.73	87.3	0.61	72.8
5 Door	30"	0.91	109.4	0.76	90.8
6 Door	30"	1.10	131.5	0.91	108.8

Back-To-Back

Case Length	Door Size	OP45		Optimax Pro 24 Low	
		120 Volts		120 Volts	
		Amps	Watts	Amps	Watts
4 Door	30"	0.72	86.2	0.62	73.6
6 Door	30"	1.08	130.4	0.92	109.6
8 Door	30"	1.46	174.6	1.22	145.6
10 Door	30"	1.82	218.8	1.52	181.6
12 Door	30"	2.20	263	1.82	217.6

GUIDELINES & CONTROL DATA

Application	Door	BTUH/Door		Evaporator (°F)	Superheat Set Point @ Bulb (°F)	Discharge Air (°F)	Discharge Air Velocity (FPM)
		Conventional	Parallel				
Frozen	Heated	891	866	-7	3-5	-1	350
Frozen	Low E	855	831	-7	3-5	-1	350
Ice Cream	Heated	928	902	-15	3-5	-8	350
Ice Cream	Low E	873	848	-15	3-5	-8	350



ORIZ

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

Rev Date:	Rev #	Revision Description:
04-23-18	2	NEW STANDARDS
12-1-17	1	DOE 2017



ANTI CONDENSATE DATA Single-Side											
Case Length	Door Size	Individual Circuits									
		190 Doors				ELMD, ELMH, Doors				Door Frame	
		Heated Doors		Low E Doors		Heated Doors		Low E Doors		101-LE	
		120 Volts		120 Volts		120 Volts		120 Volts		120 Volts	
Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
2 Door	30"	0.53	63	0.32	38	0.59	71	0.35	42	1.19	143
3 Door	30"	0.79	95	0.48	57	0.89	107	0.53	63	1.67	200
4 Door	30"	1.05	126	0.63	76	1.18	142	0.70	84	2.18	262
5 Door	30"	1.32	158	0.79	95	1.48	178	0.88	105	2.64	317
6 Door	30"	1.58	190	0.95	114	1.78	213	1.05	126	3.13	376

Back-To-Back											
Case Length	Door Size	Individual Circuits									
		190 Doors				ELMD, ELMH, Doors				Door Frame	
		Heated Doors		Low E Doors		Heated Doors		Low E Doors		101-LE	
		120 Volts		120 Volts		120 Volts		120 Volts		120 Volts	
Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
4 Door	30"	1.06	126	0.64	76	1.18	142	0.70	84	2.38	286
6 Door	30"	1.58	190	0.96	114	1.78	214	1.06	126	3.34	400
8 Door	30"	2.10	252	1.26	152	2.36	284	1.40	168	4.36	524
10 Door	30"	2.64	316	1.58	190	2.96	356	1.76	210	5.28	634
12 Door	30"	3.16	380	1.90	228	3.56	426	2.10	252	6.26	752

DEFROST CONTROLS						
Defrosts Per Day	Electric Defrost			Hot Gas Defrost		
	Fail-Safe (Min)	Termination Temp (°F)	Electric Defrost Run-Off Time (Min)	Fail-Safe (Min)	Termination Temp (°F)	Hot Gas Defrost Run-Off Time (Min)
1	46	50	0	24	73	13-15

NOTES

- "---" indicates that this feature is not an option on this case model.
- For back-to-back configurations, customers are required to install separate current-limiting devices for each side of the case per the amperage values listed. (Current-limiting devices are available for purchase through Hillphoenix).
- Drain heater and fan motors share the same circuit (separate cycles). Electrical circuits must be properly sized to accommodate the higher current draw of the tank heater.
- Defrost heater 3-phase load is unbalanced.
- 3-phase defrost heater data listed represents the maximum amps per phase.
- Data listed is for Optimax Radiant and low power Optimax Pro (high power available). For other lighting options please contact your sales representative.
- Anti-condensate heat values for Low E doors represent a door with no heat on the glass.
- Listed discharge air velocity represents the average velocity at the peak of defrost.
- Temperature and defrost settings listed above are recommended start-up settings. Final operational settings may need to be adjusted for the store conditions in which the case operates.
- The recommended evaporator temperatures may need to be adjusted based on system setup, store conditions, etc. The minimum recommended evaporator temperature is 4°F below the listed evaporator temperature.
- Typical electric defrost time is 20 minutes when ambient conditions are 75°F / 55%RH.
- Low energy doors (no heat on the glass) do not require anti-condensate or lighting controls. Frame A/S heat is cycled off during defrost cycles.
- Heated doors (heat on the glass) require anti-condensate and lighting controls. Frame A/S heat is cycled off during defrost cycles.
- Light and A/S wattages above reflect 100% run time. To determine actual daily energy usage at 75°F/55%RH conditions, reduce the light wattages above by 42% and reduce the A/S values above by the minimum off time.




ORIZ

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

Rev Date:	Rev #	Revision Description:
04-23-18	2	NEW STANDARDS
12-1-17	1	DOE 2017





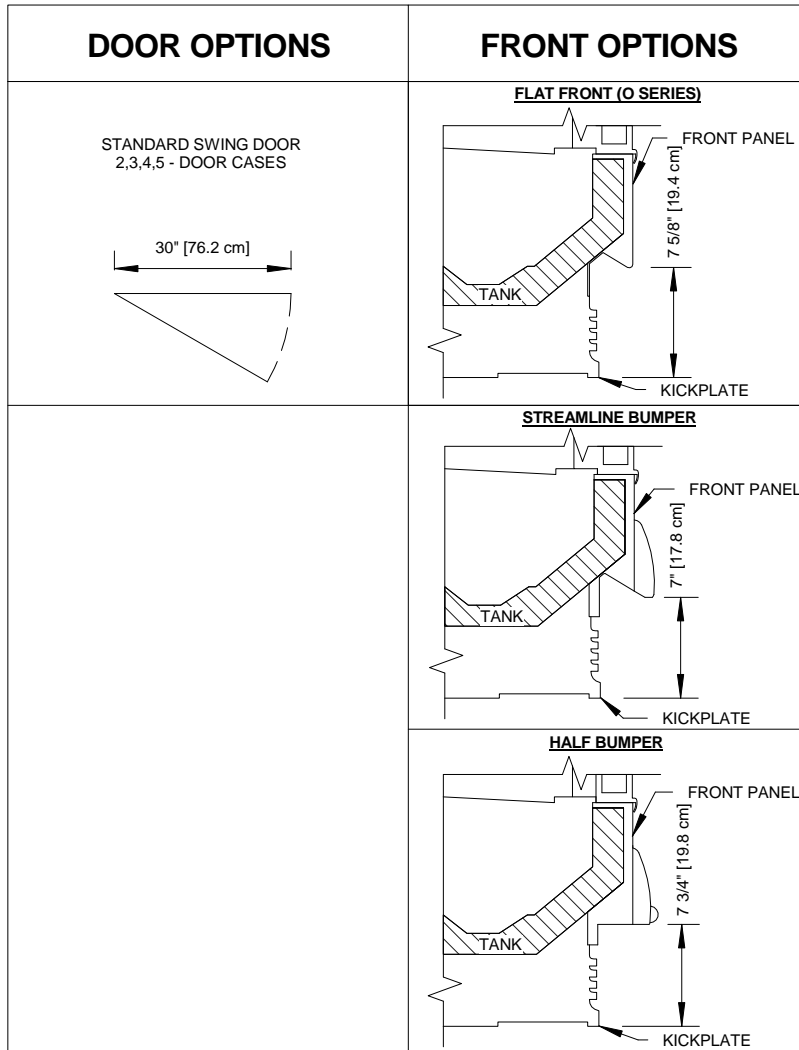

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

ORIZ

Rev Date:	Rev #	Revision Description:
04-23-18	2	NEW STANDARDS
12-1-17	1	DOE 2017

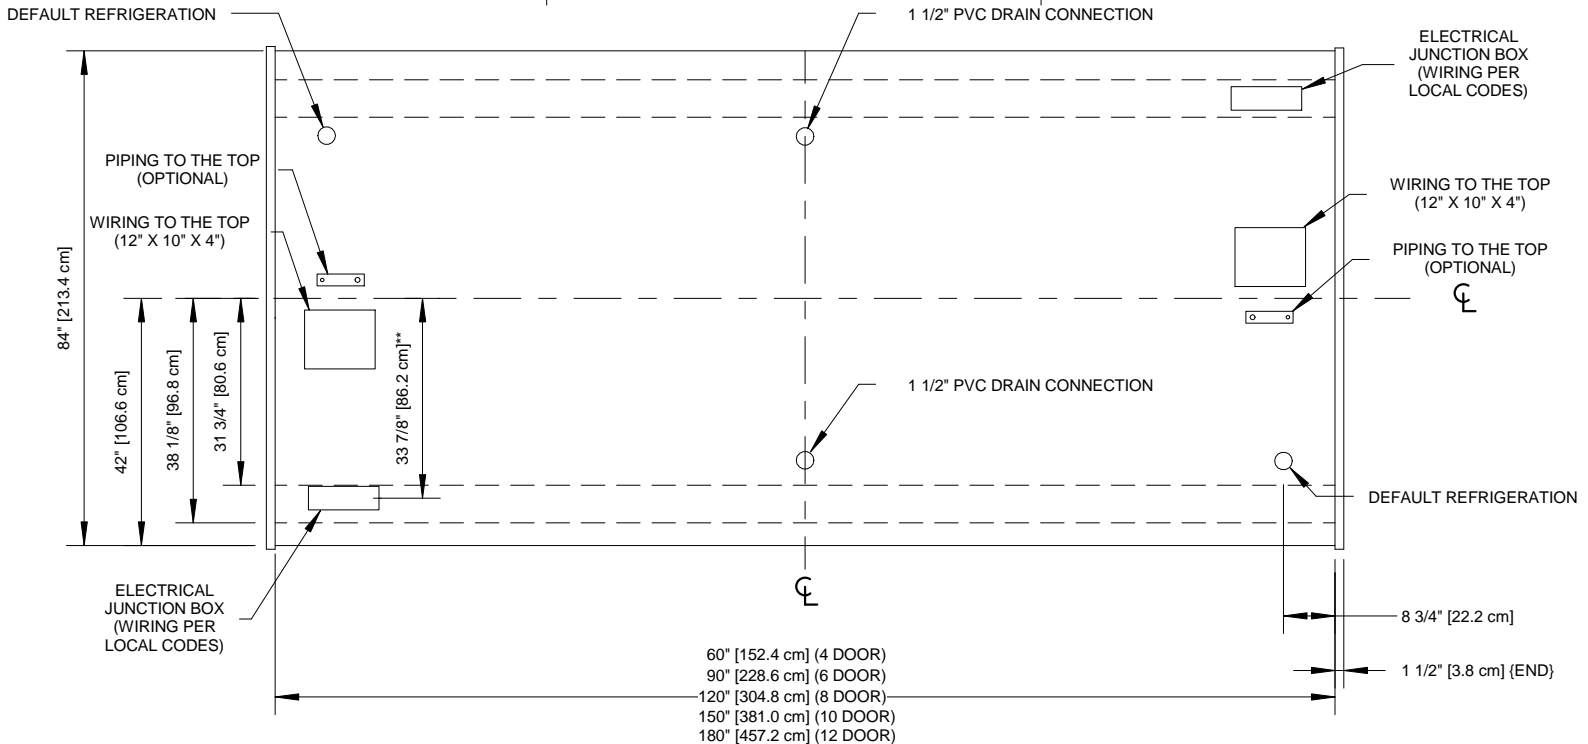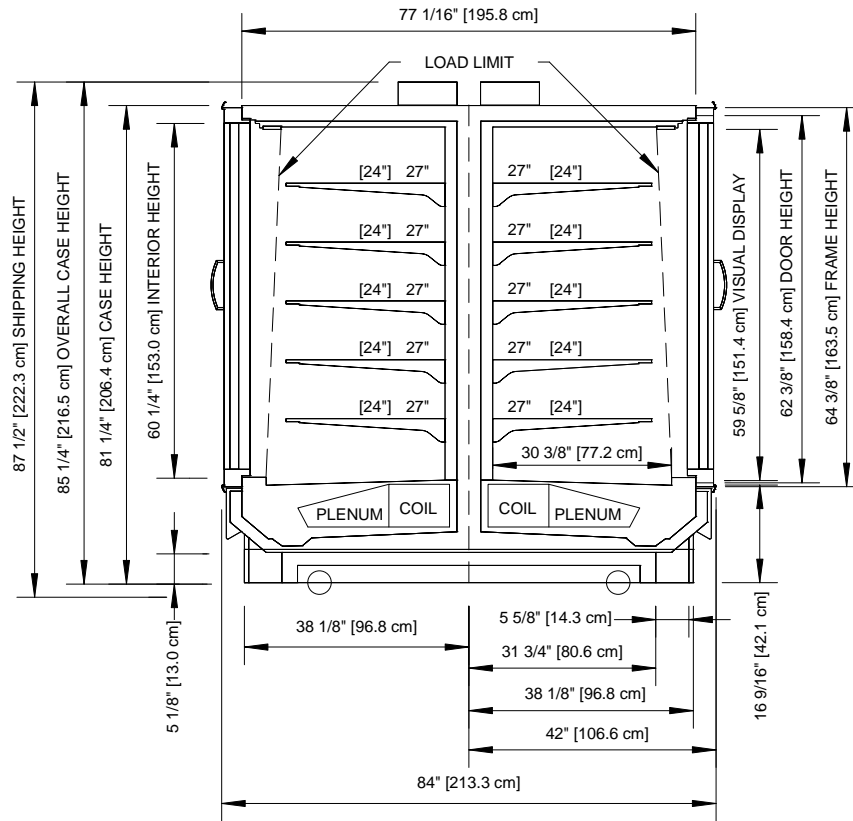

NOTES

- * : STUB-UP AREA
- ** : RECOMMENDED STUB-UP CENTERLINE FOR ELECTRICAL AND HUB DRAINS

- Ends add approximately 1" to case height, 1/2" to the back & 1" to the front



ORIZ

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

Rev Date:	Rev #	Revision Description:
04-23-18	2	NEW STANDARDS
12-1-17	1	DOE 2017

