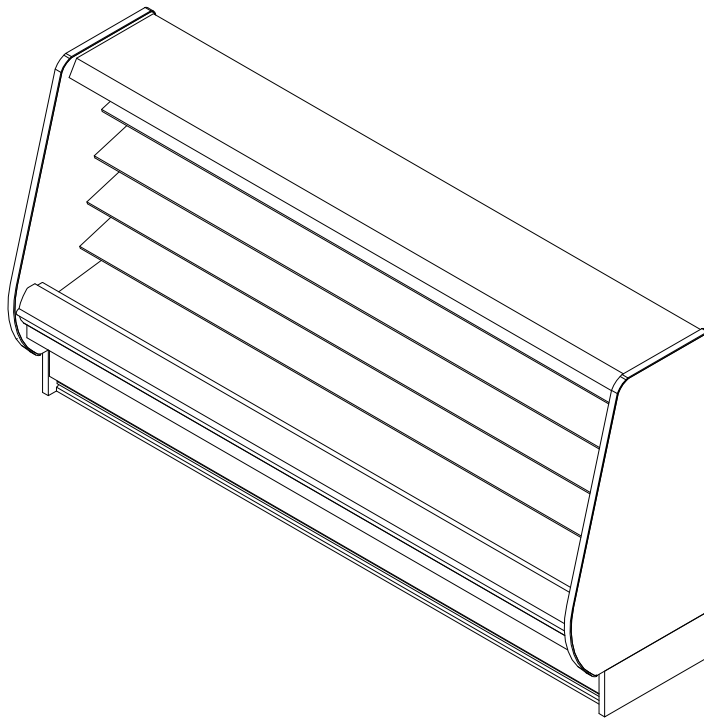


# ON5UM-NRG

Narrow MultiDeck Utility Merchandiser with Synergy™  
4', 6', 8', 12' Dairy/Deli/Meat/Produce

## GENERAL NOTES

- "----" indicates that the feature is not an option for this case model and/or the data is not yet available.



SHIPPING WEIGHT	
Case	Weight
ON5UM-NRG	---



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

## ON5UM-NRG

Rev. Date	Rev. #	Rev. Title
9-11-18	3	DATA UPDATE
5-15-18	2	NEW STANDARDS

**Hillphoenix**  
A DOVER COMPANY

# ON5UM-NRG

Narrow MultiDeck Utility Merchandiser with Synergy™  
4', 6', 8', 12' Dairy/Deli/Meat/Produce

ELECTRICAL DATA			
Case Length	Fans Per Case	High Efficiency Fans	
		120 Volts	
		Amps	Watts
4'	1	0.16	11.0
6'	2	0.32	22.0
8'	2	0.32	22.0
12'	3	0.48	33.0

LIGHTING DATA						
Case Length	Lights per row	Lights Length	Clearvoyant LEF Lighting (Per Light Row)			
			Standard Power (Cornice or Shelf)		High Power (Cornice)	
			120 Volt		120 Volts	
			Amps	Watts	Amps	Watts
4'	1	4'	0.05	5.9	0.12	14.9
6'	2	3'	0.08	9.4	0.20	23.8
8'	2	4'	0.10	11.8	0.25	29.9
12'	3	4'	0.15	17.6	0.37	44.8

GUIDELINES AND CONTROL SETTINGS							
Application	Front Sill Height	BTUH/ft		Superheat Set Point @ Bulb (°F)	Evaporator (°F)	Discharge Air (°F)	Discharge Air Velocity (FPM)
		Conventional	Parallel				
Dairy	All	1143	1000	6 - 8	28	31	180

DEFROST CONTROLS		
Defrosts Per Day	Timed-Off Defrost	
	Fail-Safe (Min)	Termination Temp (°F)
6	30	47

## Notes:

- "---" indicates that the feature is not an option with this case model.
- Listed BTUH/ft data represent unlighted shelves. For LED lighting, add 9 BTUH/ft per row of lighted shelving.
- Listed discharge air velocity represents the average velocity immediately after defrost.
- Temperature and defrost settings listed above are recommended start-up settings. Final operational settings may need to be adjusted for the store conditions in which the case operates.
- The recommended evaporator temperatures may need to be adjusted based on system setup, store conditions, etc. The minimum recommended evaporator temperature is 4°F below the listed evaporator temperature.
- Timed off defrost is recommended for medium temperature applications.



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

## ON5UM-NRG

Rev. Date	Rev. #	Rev. Title
9-11-18	3	DATA UPDATE
5-15-18	2	NEW STANDARDS

**Hillphoenix**  
A DOVER COMPANY

# ON5UM-NRG

Narrow MultiDeck Utility Merchandiser with Synergy™  
4', 6', 8', 12' Dairy/Deli/Meat/Produce

SECOND NATURE DATA								
Case Model	No. of Coils	Application	Front Sill Type	BTUH/FT (DR)		GPM/ft (DR)	Supply Fluid Temp (°F)	Discharge Air Temp (°F)
				Conventional	Parallel			
ON5UM-NRG	1	Deli/Produce	All Fronts	1064	975	0.28	20	31
ON5UM-NRG	1	Deli/Produce	All Fronts	1064	975	0.71	25	31

SECOND NATURE DATA								
Case Model	No. of Coils	Application	Front Sill Type	No. of Defrost	Timed-Off Defrost		Warm Fluid Defrost	
					Fail Safe (Min)	Termination Temp (°F)	Fail Safe (Min)	Termination Temp (°F)
ON5UM-NRG	1	Deli/Produce	All Fronts	6	60	47	26	49
ON5UM-NRG	1	Deli/Produce	All Fronts	6	45	42	26	49



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

## ON5UM-NRG






















Rev. Date	Rev. #	Rev. Title
9-11-18	3	DATA UPDATE
5-15-18	2	NEW STANDARDS

**Hillphoenix**  
A DOWER COMPANY

# ON5UM-NRG

Narrow MultiDeck Utility Merchandiser with Synergy™

4', 6', 8', 12' Dairy/Deli/Meat/Produce

REAR SILL OPTIONS	FRONT OPTIONS					
	ORIGIN 2 FRONT				FLAT FRONT FLAT TOP	
	STANDARD FRONT	STANDARD FRONT	STANDARD FRONT	STANDARD FRONT	STANDARD FRONT	STANDARD FRONT
<b>16" REAR SILL (FRONT DISCHARGE)</b>  16" [40.7 cm]						
<b>18" REAR SILL (FRONT DISCHARGE)</b>  18" [45.8 cm]						
<b>20" REAR SILL (FRONT DISCHARGE)</b>  20 1/8" [51.0 cm]						
	<b>6" THERMOPANE FRONT</b>	<b>6" THERMOPANE FRONT</b>	<b>6" THERMOPANE FRONT</b>	<b>6" THERMOPANE FRONT</b>	<b>6" THERMOPANE FRONT</b>	<b>6" THERMOPANE FRONT</b>
	<b>6" PLEXIGLAS FRONT</b>	<b>6" PLEXIGLAS FRONT</b>	<b>6" PLEXIGLAS FRONT</b>	<b>6" PLEXIGLAS FRONT</b>	<b>6" PLEXIGLAS FRONT</b>	<b>6" PLEXIGLAS FRONT</b>
	<b>EXTENDED STANDARD FRONT</b>	<b>EXTENDED STANDARD FRONT</b>	<b>EXTENDED STANDARD FRONT</b>	<b>EXTENDED STANDARD FRONT</b>	<b>EXTENDED STANDARD FRONT</b>	<b>EXTENDED STANDARD FRONT</b>
	<b>FLAT FRONT ANGLED TOP</b>	<b>FLAT FRONT ANGLED TOP</b>	<b>FLAT FRONT ANGLED TOP</b>	<b>FLAT FRONT ANGLED TOP</b>	<b>FLAT FRONT ANGLED TOP</b>	<b>FLAT FRONT ANGLED TOP</b>
	<b>STANDARD FRONT</b>	<b>STANDARD FRONT</b>	<b>6" PLEXIGLAS FRONT</b>	<b>6" PLEXIGLAS FRONT</b>	<b>6" THERMOPANE FRONT</b>	<b>6" THERMOPANE FRONT</b>
	<b>6" THERMOPANE FRONT</b>	<b>6" THERMOPANE FRONT</b>	<b>EXTENDED STANDARD FRONT</b>	<b>EXTENDED STANDARD FRONT</b>		

**NOTES:**

- Front and rear sill heights vary with base frame height
- Extended front sills are required on meat applications to maintain proper product temperature. An extended front has a minimum height of 24" on a 5" baseframe, or a 30" on an 11" baseframe.



**ON5UM-NRG**

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

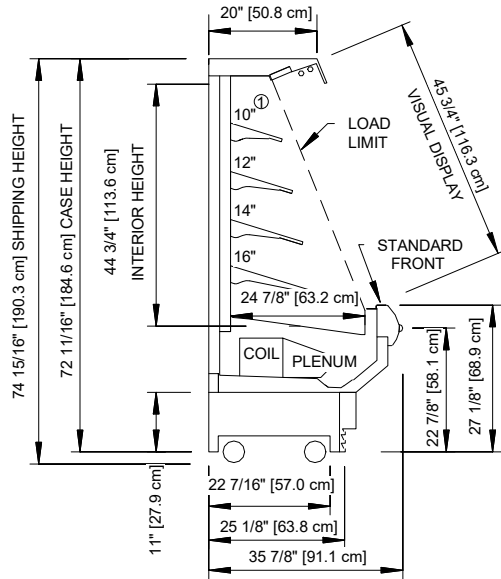
Rev. Date	Rev. #	Rev. Title
9-11-18	3	DATA UPDATE
5-15-18	2	NEW STANDARDS




A DOVER COMPANY

# ON5UM-NRG


Narrow MultiDeck Utility Merchandiser with Synergy™  
4', 6', 8', 12' Dairy/Deli/Meat/Produce



**11" BASEFRAME**

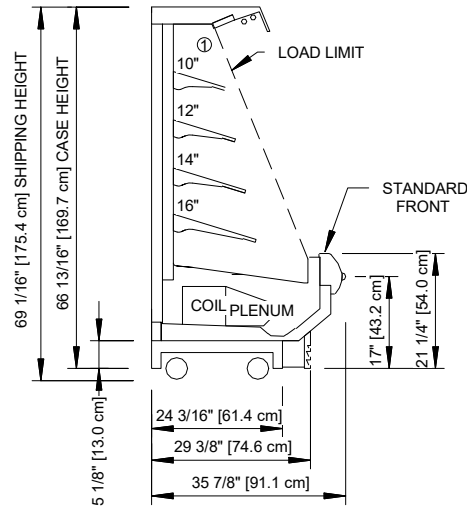

**5" BASEFRAME**

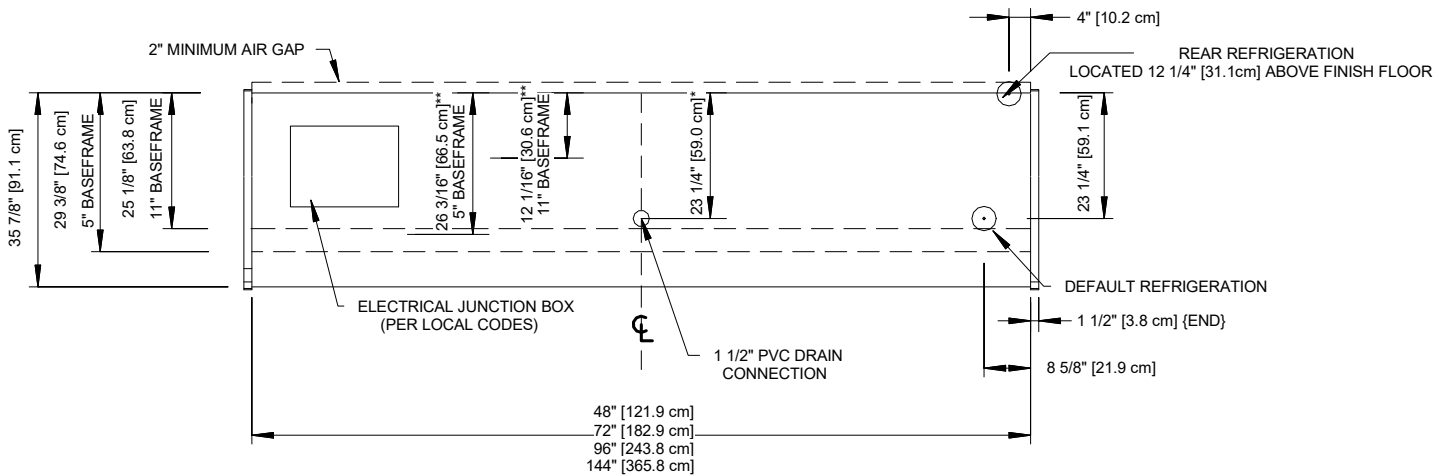

**NOTES:**

- \* :STUB-UP AREA
- \*\* :RECOMMENDED STUB-UP CENTERLINE FOR ELECTRICAL AND HUB DRAINS
- ① :AVAILABLE SHELF SIZES: 10", 12", 14", 16", & 18"

- Ends add approximately 1" to case height, 1" to the front and 1/2" to the back
- Product on top shelf should be 3" below discharge.



**ON5UM-NRG**

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

Rev. Date	Rev. #	Rev. Title
9-11-18	3	DATA UPDATE
5-15-18	2	NEW STANDARDS

