

Hillphoenix

a **DOVER** company

**The
SFC
Group**

*Solutions for
convenience sake*



VNRB

Medium Temperature Glass Door Reach-In


Small-store format, refrigerated reach-in merchandiser for beverage and dairy.

VNRB - Medium Temperature Glass Door Reach-In



Base Model Features

- Available lengths – 2, 3, 4 & 5 doors.
- 5" baseframe.
- Custom color, flat front panel.
- 1" black bumper.
- Metal-louvered kick plates.
- Square end panels with black PVC trim.
- Black interior with black polymer deck pans.
- Black flat bottom wire rack with 3" lip and black PVC PTM.
- (5) rows 24"x30" matte black solid shelves with black PVC PTM.
- Black Anthony 101 door frames w/Optimax Pro high output 3500K LEDs, LH swing.
- Black Anthony ELMD doors with short handles, LH swing.
- Customer-provided light controls.
- Solar digital thermometer.
- Refrigeration:
 - R448A DX refrigerant type.
 - TXV balance port sweat.
- Heat exchanger.
- Refrigeration lines piped to the bottom.
- Hand valve.
- EBM high-efficiency fan motors.
- Time-off defrost.
- Conforms to UL Standard 471, NSF Standard 7 and CAN/CSA C22.2.

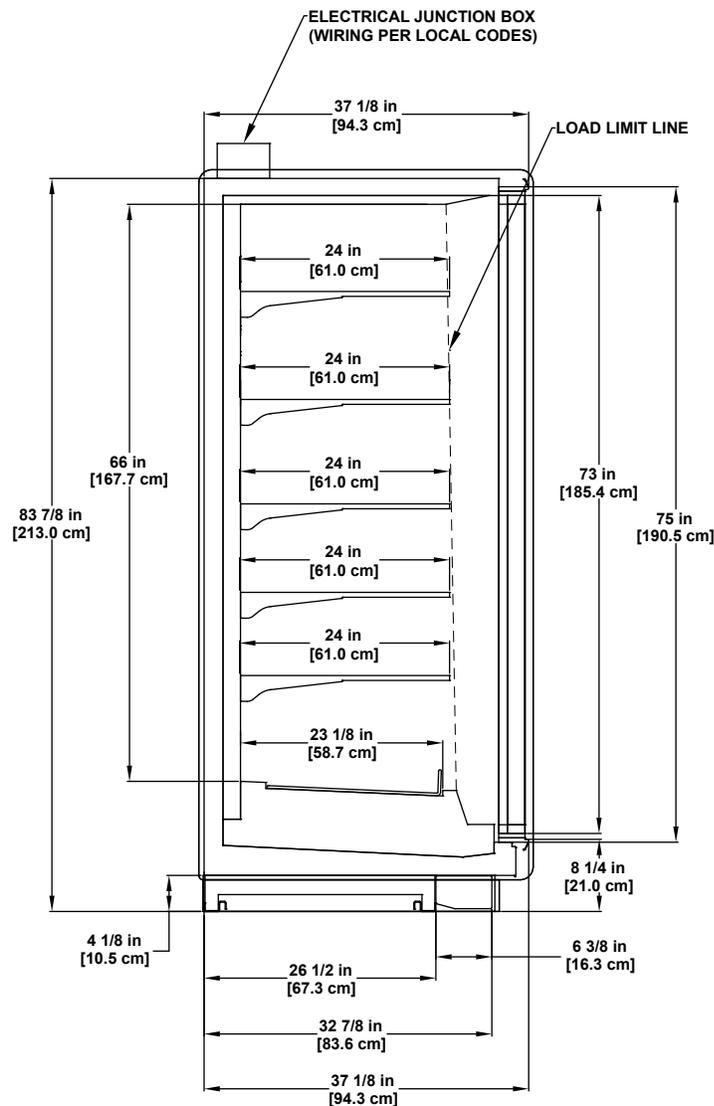

2017
DOE
COMPLIANT

Please consult Hillphoenix Engineering Reference Manual for dimensions, plan views and technical specifications. Specifications are subject to change without notice. Certified to UL 471 and ANSI/NSF standard 7.

Designed for optimal performance in store environments where temperatures and humidity do not exceed 75°F and 55%R.H.

Available Options

- Brushed stainless front end trim (S3).
- Black Anthony 101L and Vista door frames with Optimax Pro high-output 3500K LEDs, LH swing.
- Available doors: ELM D & Infinity 90 doors on 101 frames; Vista C, Infinity 60, Vista Elite doors on Vista frames.
- White case interior.
- 4 rows of shelving.
- Top wiring.
- R407A refrigerant.
- Top piping.
- Temperature control TStat.
- Temperature probe.

Fast Facts...

- Standard high-efficiency ECM fan motors for optimum energy savings.
- 75" tall door, coupled with 8" ultra-low front, maximizes product visibility and merchandising versatility.
- Bottom-located refrigeration components facilitate serviceability and allow for full top shelf merchandising.
- Refrigeration component placement below the deck pan ensures no plan-o-gram restrictions and maximizes merchandising visibility.
- All-steel construction for increased life span and structural integrity.
- Seamless tank liner provides positive drain runoff and enhanced sanitation.
- Removable castors for easy merchandiser unloading, movement and installation.

Hillphoenix

a **DOVER** company

2016 Gees Mill Road
Conyers, GA 30013
844.591.5937
www.hillphoenix.com

©2018 Hillphoenix, Inc.