



Solutions for convenience sake



VNRZ

Low Temperature Glass Dooor Reach-In

Small-store format, refrigerated reach-in merchandiser for frozen foods.

VNRZ - Low Temperature Glass Door Reach-In




Base Model Features

- Available lengths 1, 2, 3, 4 & 5 doors.
- 5" baseframe.
- Custom color flat front panel.
- 1" black bumper.
- Custom color, metal-louvered kick plates.
- Square end panels with black
 PVC trim.
- Black interior with black polymer deck pans.
- Black flat bottom wire rack with 3" lip and black PVC PTM.

- (5) Rows 24"x30" matte black solid shelves with black PVC PTM.
- Black Anthony 101LE door frames w/Optimax Pro high-output 4000K LEDs, LH swing.
- Black Anthony ELMD doors with short handles, LH swing.
- \cdot Customer-provided light controls and A/C control.
- Solar digital thermometer
- Refrigeration:
 - R448A DX Refrigerant.
 - TXV balance port sweat.

- Heat exchanger.
- Refrigeration lines piped to the bottom.
- Hand valve.
- EBM high-efficiency fan motors.
- Electric defrost 1-phase.
- Electronic defrost/fan control wired to bottom.
- Conforms to UL Standard 471, NSF Standard 7 and CAN/CSA C22.2.



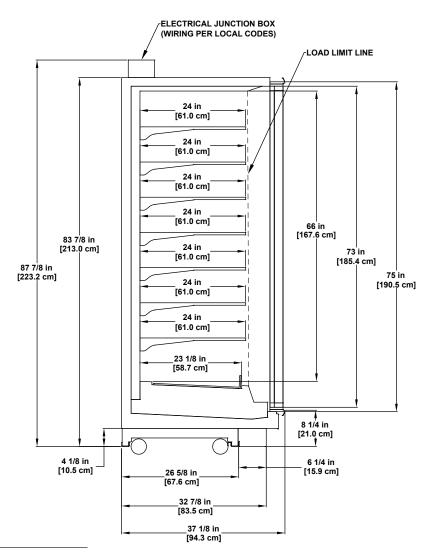



Please consult Hillphoenix Engineering Reference Manual for dimensions, plan views and technical specifications. Specifications are subject to change without notice. Certified to UL 471 and ANSI/NSF standard 7.

Designed for optimal performance in store environments where temperatures and humidity do not exceed 75°F and 55%R.H.

Available Options

- Brushed stainless front end trim (S3).
- Black Anthony 101LE door frames with Optimax Pro high-output 3500K LEDs, LH swing.
- · White case interior.
- 4 rows of shelving.
- Top wiring.
- R407A refrigerant.
- · Hot gas defrost.
- Top piping.
- Temperature control TStat.
- Temperature probe.

Fast Facts...

- Proprietary NRGcoil[™], coupled with high-efficiency ECM fan motors, ensures uniform case performance, lower average product temperatures and maximum energy savings.
- 75" tall door, coupled with 8" ultra-low front, maximizes product visibility and merchandising versatility.
- Bottom-located refrigeration components facilitate
 serviceability and allow for full top shelf merchandising.
- With easy to design POG's, with no restrictions in the 66" interior height enhance planogram design options with added flexibility and versatility allowing for product to take center stage.
- All-steel construction for increased life span and structural integrity.
- Seamless tank liner provides positive drain runoff and enhanced sanitation.
- Removable castors for easy merchandiser unloading, movement and installation.



2016 Gees Mill Road Conyers, GA 30013 844.591.5937 www.hillphoenix.com

©2018 Hillphoenix, Inc.