


GENERAL NOTES:

- "- --" indicates that the feature is not available for this case model and/or the data is not available yet.
- · LED lights only.



| SHIPPING WEIGHT | | | |
|-----------------|--------|--|--|
| Case | Weight | | |
| 6NDMLH-NRG | | | |

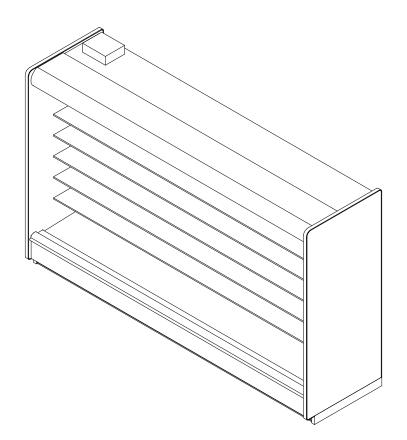

COMPONENT ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

| Rev. Date | Rev. # | Rev. Title |
|-----------|--------|----------------|
| 8-3-20 | 8 | SHELF UPDATE |
| 9-23-19 | 7 | OPTIONS UPDATE |



ELECTRICAL DATA

| | | High Effic | iency Fans |
|--------|----------|------------|------------|
| Case | Fans Per | 120 | Volt |
| Length | Case | Amps | Watts |
| 4' | 2 | 0.38 | 43.0 |
| 6' | 3 | 0.57 | 65.0 |
| 8' | 3 | 0.57 | 65.0 |
| 12' | 4 | 0.76 | 87.0 |

LIGHTING DATA

| | | Clearvoyant v4 LED Lighting (Per Light Row) | | | | | |
|--------|---------|--|----------------------|------|-------------------|--|--|
| | | | d Power or Shelf) | | Power ce Only) | | |
| Case | Lights | 120 Volts | | 120 | Volts | | |
| Length | per row | Amps | Watts | Amps | Watts | | |
| 4' | 1 | 0.05 | 5.9 | 0.12 | 14.9 | | |
| 6' | 2 | 0.08 | 9.4 | 0.20 | 23.8 | | |
| 8' | 2 | 0.10 | 11.8 | 0.25 | 29.9 | | |
| 12' | 3 | 0.15 | 17.6 | 0.37 | 44.8 | | |

GUIDELINES AND CONTROL SETTINGS

| | | BTUH/ft | | Superheat Set | | | |
|-------------------------------|-------------------|--------------|----------|---------------|------------|-----------|----------------|
| | | | | Point @ Bulb | Evaporator | Discharge | Discharge Air |
| Application | Front Sill height | Conventional | Parallel | (°F) | (°F) | Air (°F) | Velocity (FPM) |
| Bakery/Dairy/Deli/Cut Produce | Standard | 1862 | 1748 | 6 - 8 | 28 | 31 | 260 |
| Beverage/Bulk Produce | Standard | 1860 | 1819 | 6 - 8 | 34 | 37 | 260 |

DEFROST CONTROLS

| | | Timed-0 | Off Defrost |
|-------------------------------|--------------|-----------|-------------|
| | Defrosts Per | Fail-Safe | Termination |
| Application | Day | (Min) | Temp (F) |
| Bakery/Dairy/Deli/Cut Produce | 6 | 40 | 47 |
| Beverage/Bulk Produce | 2 | 30 | 47 |

NOTES:

• "- - -" indicates that the feature is not available for this case model and/or the data is not available yet.

• Listed BTUH/ft data represent unlighted shelves. For LED lighting, add 9 BTUH/ft to determine Total Case Lighting BTUH Load, then divide by the length of the case to obtain a value in BTUH/ft. BTUH load increases by 132 BTUH/ft when aftermarket merchandising accessories are utilized.

• Listed evaporator temperature represents unlighted shelves. For lighted shelves and/or aftermarket merchandising accessories, reduce the listed evaporator temperature by 2°F.

• Conventional Discharge Air Control – Recommended Settings: Cut-In Temp = Discharge Air + 2°F; Cut-Out Temp = Discharge Air - 2°F.

· Listed discharge air velocity represents the average velocity immediately after defrost.

• Temperature and defrost settings listed below are recommended start-up settings. Final operational settings may need to be adjusted for the store conditions in which the case operates.

• The recommended evaporator temperatures may need to be adjusted based on system setup, store conditions, etc. The minimum recommended evaporator temperature is 4°F below the listed evaporator temperature.



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

| Rev. Date | Rev. # | Rev. Title |
|-----------|--------|----------------|
| 8-3-20 | 8 | SHELF UPDATE |
| 9-23-19 | 7 | OPTIONS UPDATE |



6NDMLH-NRG

4', 6', 8' & 12' Narrow Multi-Deck Merchandiser with Synerg-E™ Beverage / Bulk Produce / Bakery / Dairy / Cut Produce / Deli

SECOND NATURE DATA

| | No. of | | Front Sill | BTUH/FT | | GPM/ft | Supply Fluid | Discharge Air |
|------------|--------|-------------------------------|------------|--------------|----------|--------|--------------|---------------|
| Case Model | Coils | Application | Height | Conventional | Parallel | (DR) | Temp (°F) | Temp (°F) |
| 6NDMLH-NRG | 1 | Bakery/Deli/Dairy/Cut Produce | Standard | 1862 | 1748 | 0.46 | 20 | 31 |
| 6NDMLH-NRG | 1 | Bulk Produce/Beverage | Standard | 1860 | 1819 | 0.21 | 20 | 37 |
| 6NDMLH-NRG | 1 | Bakery/Deli/Dairy/Cut Produce | Standard | 1862 | 1748 | 0.83 | 25 | 31 |
| 6NDMLH-NRG | 1 | Bulk Produce/Beverage | Standard | 1860 | 1819 | 0.38 | 25 | 37 |

SECOND NATURE DATA

| | | | | Supply | | Timed- | Off Defrost | Warm F | luid Defrost |
|------------|--------|-------------------------------|------------|--------|---------|-----------|-------------|-----------|--------------|
| | | | | Fluid | | | | | |
| | No. of | | Front Sill | Temp | No. of | Fail-Safe | Termination | Fail-Safe | Termination |
| Case Model | Coils | Application | Height | (°F) | Defrost | (Min) | Temp (°F) | (Min) | Temp (°F) |
| 6NDMLH-NRG | 1 | Bakery/Deli/Dairy/Cut Produce | Standard | 20 | 6 | 60 | 47 | 26 | 49 |
| 6NDMLH-NRG | 1 | Bulk Produce/Beverage | Standard | 20 | 6 | 60 | 47 | 26 | 49 |
| 6NDMLH-NRG | 1 | Bakery/Deli/Dairy/Cut Produce | Standard | 25 | 6 | 45 | 42 | 26 | 49 |
| 6NDMLH-NRG | 1 | Bulk Produce/Beverage | Standard | 25 | 6 | 45 | 42 | 26 | 49 |

NOTES:

· All medium temperature data listed is for 35% by wt. PROPYLENE GLYCOL.

• Inhibited Propylene Glycol solution with water, such as Dowfrost or equivalent. (Dowfrost is a trademark of the Dow Chemical Company).

· Flowrates are determined by ASHRAE test conditions and may need to be adjusted based on store conditions.


• ** Flowrates are per case



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

| Rev. Date | Rev. # | Rev. Title |
|-----------|--------|----------------|
| 8-3-20 | 8 | SHELF UPDATE |
| 9-23-19 | 7 | OPTIONS UPDATE |



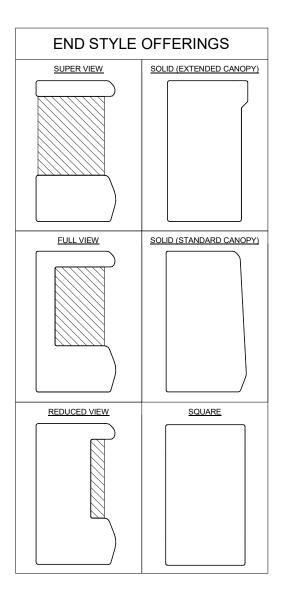

NOTES:

- Ends shown are for general use only. Shape, size, and appearance are subject to change based on engineering configuration.
- · Hatched regions represent glass inserts.
- Ends add approximately 1" to case height, 1/2" to the back & 1" to the front.
- Ends are available with either polymer end trim or metal end trim.




ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

| Rev. Date | Rev. # | Rev. Title |
|-----------|--------|----------------|
| 8-3-20 | 8 | SHELF UPDATE |
| 9-23-19 | 7 | OPTIONS UPDATE |



6NDMLH-NRG

4', 6', 8' & 12' Narrow Multi-Deck Merchandiser with Synerg-E™ Beverage / Bulk Produce / Bakery / Dairy / Cut Produce / Deli

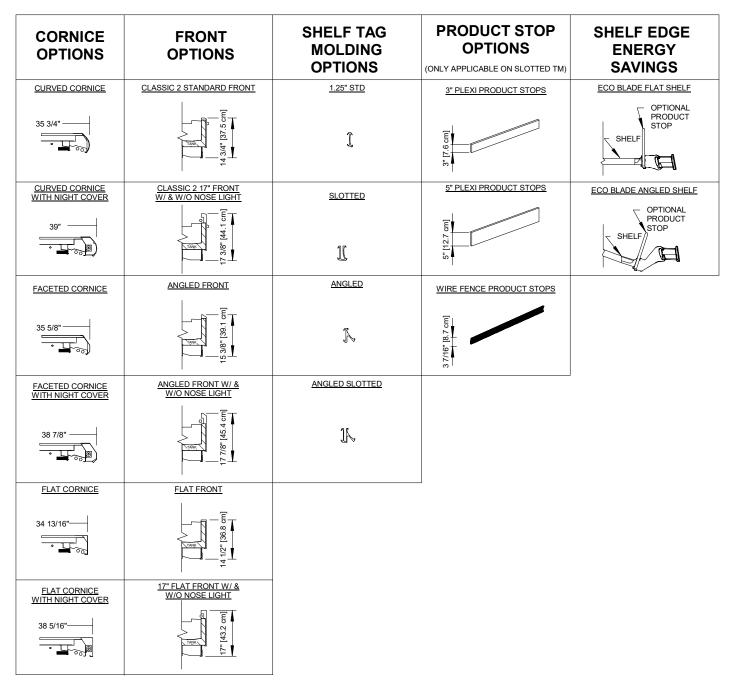

NOTES:

- Tag molding materials are PVC, aluminum, or painted aluminum.
- · See Ecoblade tech sheet for additional information.




ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

| Rev. Date | Rev. # | Rev. Title |
|-----------|--------|----------------|
| 8-3-20 | 8 | SHELF UPDATE |
| 9-23-19 | 7 | OPTIONS UPDATE |



6NDMLH-NRG

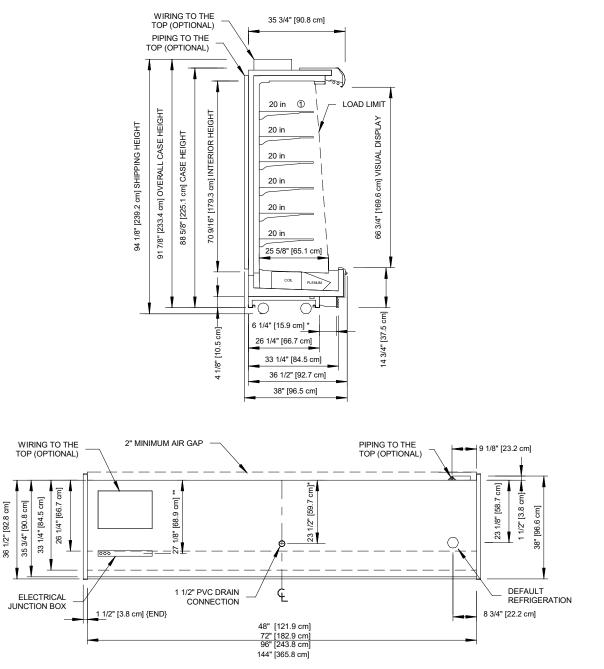

NOTES:

- * : STUB-UP AREA
- ** : RECOMMENDED STUB-UP CENTERLINE FOR ELECTRICAL AND HUB DRAINS
- ① : AVAILABLE SHELF SIZES: 10", 12", 14", 16", 18", 20", 22" ; (6) ROWS OF SHELVES MAX
- · Ends add approximately 1" to case height.
- Back panels add approximately 1" to the rear of the case.



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

| Rev. Date | Rev. # | Rev. Title |
|-----------|--------|----------------|
| 8-3-20 | 8 | SHELF UPDATE |
| 9-23-19 | 7 | OPTIONS UPDATE |

