



CLARITY® reach-in merchandisers, customized with the ideal frame and door options, deliver superior performance for every need. Multiple sizes and configurations help store merchandisers provide unique refrigeration options and enhanced product displays to create a superior shopper experience.

**CLARITY**  
Reach-In Merchandisers from Hillphoenix

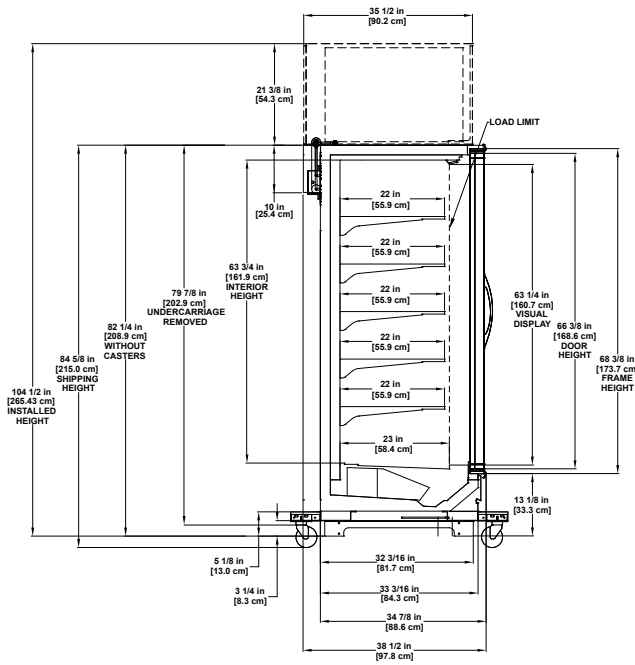


Photo may depict options not included on standard models.

## **JNRZHSA/JNRBHSA**

# Self-Contained Glass Door Reach-In

Medium and low temperature merchandisers for beverage, produce, dairy, deli, meat, seafood, frozen food and ice cream.



**JNRZ(B)HSA - Field-Installed Condensing Unit\***



Please consult Hillphoenix Engineering Reference Manual for dimensions, plan views and technical specifications. Specifications subject to change without notice. Designed for optional performance in store environments where temperature and humidity do not exceed 75 degrees and 55% R.H. Certified to UL 471 and ANSI/NSF Standard 7.


Designed for optimal performance in store environments where temperatures and humidity do not exceed 75°F and 55%R.H.

### Base Model Features

- Bottom-located refrigeration components facilitate serviceability and allow for full top shelf merchandising.
- Modular interior component design allows easy access to the coil, fans and drain for ease of maintenance.
- Proprietary Synerg-E® technology and energy-efficient fan motors ensures uniform case performance and lower average product temperatures with optimum energy efficiency.
- Low temp and medium temp cases line up seamlessly for consistency in store design.
- LED lighting for energy efficiency and a stunning merchandise display.
- 22" shelves for maximum display capacity.
- 63-3/4" front facings with no planogram restrictions.
- Removable castors for easy merchandiser unloading, movement and installation.

### Available Options

- Low-temp 2, 3, 4 & 5 door with 30" standard swing doors.
- Variety of door rail profiles, finishes and handles.
- Low temp doors - Anthony® Infinity 90, ELM D, ELMH.
- Medium-temp doors: Standard Swing - Infinity 90 & ELM D, Bi-Swing - Infinity 60 & Vista C.
- For a wall of infinity edge glass, choose Infinity 90 door option.
- Modbus controller for ease of use.
- Motion sensors for additional energy savings.
- Field-installed cases (JNRZHSB, JNRZHSB), have modular construction to allow entry through a restricted space, to be assembled in your store. Top-mounted Field-installed condensing units feature quick connect refrigeration couplings for flexibility. Condensing units, drain components, and evaporator pans are installed on-site as plug and play components requiring minimal assembly. The cases incorporate a special base frame option allowing it to fit through an 80" door. A loading dock is not required because the design incorporates a special low base frame on wheels.

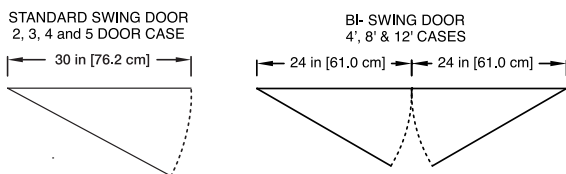

### Door Options

Consult Hillphoenix Engineering Reference Manual for more available options.

\* Specialized Base Frame: Case fits through 80" doorway with shipping undercarriage removed. 2" lifting brackets (installed) & 3.25" ship loose risers combine for 5" base frame once installed. Drain traps ship loose.



Dover Food Retail  
 Conyers, GA USA  
 844.591.5937  
 hillphoenix.com



©2020 Hillphoenix, Inc.