

Self-Contained Glass Door Reach-In

Medium and low temperature merchandisers for beverage, produce, bakery, dairy, deli, meat, seafood, frozen food and ice cream.



CLARITY® reach-in merchandisers
customized with the ideal frame


and door options deliver superior
performance for every need.

Multiple sizes and configurations
help store merchandisers provide
unique refrigeration options
and enhanced product displays
to create a superior shopper
experience.

CLARITY®
Reach-In Merchandisers from Hillphoenix



Model JNRZHSA/JNRBHSA
Self-Contained Glass Door Reach-In

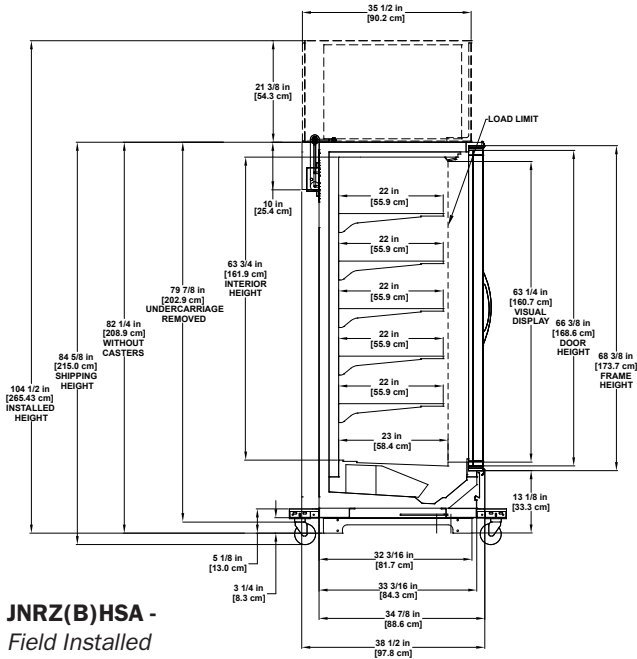

**JNRZ(B)HSA -
Field Installed
Condensing Unit***

- *Specialized Base Frame:
- Case fits through 80" doorway with shipping undercarriage removed.
 - 2" lifting brackets (installed) & 3.25" ship loose risers combine for 5" base frame once installed.
 - Drain traps ship loose.




Please consult Hillphoenix Engineering Reference Manual for dimensions, plan views and technical specifications. Specifications subject to change without notice. Designed for optional performance in store environments where temperature and humidity do not exceed 75° F and 55% R.H. Certified to UL 471 and ANSI/NSF Standard 7.

Base Model Features

- Bottom-located refrigeration components facilitate serviceability and allow for full top shelf merchandising.
- Modular interior component design allows easy access to the coil, fans and drain for ease of maintenance.
- Proprietary Synerg-E® technology and energy efficient fan motors ensure uniform case performance and lower average product temperatures with optimum energy efficiency.
- Low temp and medium temp cases line up seamlessly for consistent in-store design.
- Innovative Anthony® Optimax LED lighting for energy efficiency and a stunning merchandise display.
- 22" shelves for maximum display capacity.
- 63-3/4" front facings with no planogram restrictions.
- Removable casters for easy merchandiser unloading, movement and installation.

Available Options

- Low-temp 2, 3, 4 & 5 Door with 30" standard swing doors.
- Medium-temp: 2, 3, 4, & 5 Door with 30" standard swing doors and 4' with bi-swing doors.
- Variety of door rail profiles, finishes and handles.
- Low temp doors - Anthony® Infinity 90, ELM-D, ELM-H.
- Medium-temp doors: Standard Swing - Infinity 90 & ELM D, Bi-Swing - Infinity 60 & Vista C.
- Modbus controller for ease of use.
- Motion sensors for additional energy savings.
- Field-installed cases (JNRZHSA, JNRZHSA), have modular construction to allow entry through a restricted space, to be assembled in your store. Top-mounted Field-installed condensing units feature quick connect refrigeration couplings for flexibility. Condensing units, drain components, and evaporator pans are installed on-site as plug and play components requiring minimal assembly. The cases incorporate a special base frame option allowing it to fit through an 80" door. A loading dock is not required because the design incorporates a special low base frame on wheels.
- Polymer or metal end trim.

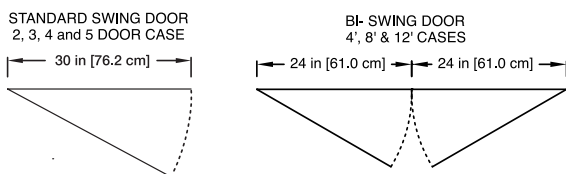

Door Options

Consult Hillphoenix Engineering Reference Manual for more available options.

Casters add 2 1/4" to shipping height.



Dover Food Retail
Conyers, GA USA
844.591.5937
hillphoenix.com

©2020 Hillphoenix, Inc.

