



Fresh thinking. Responsible solutions.

Display Cases

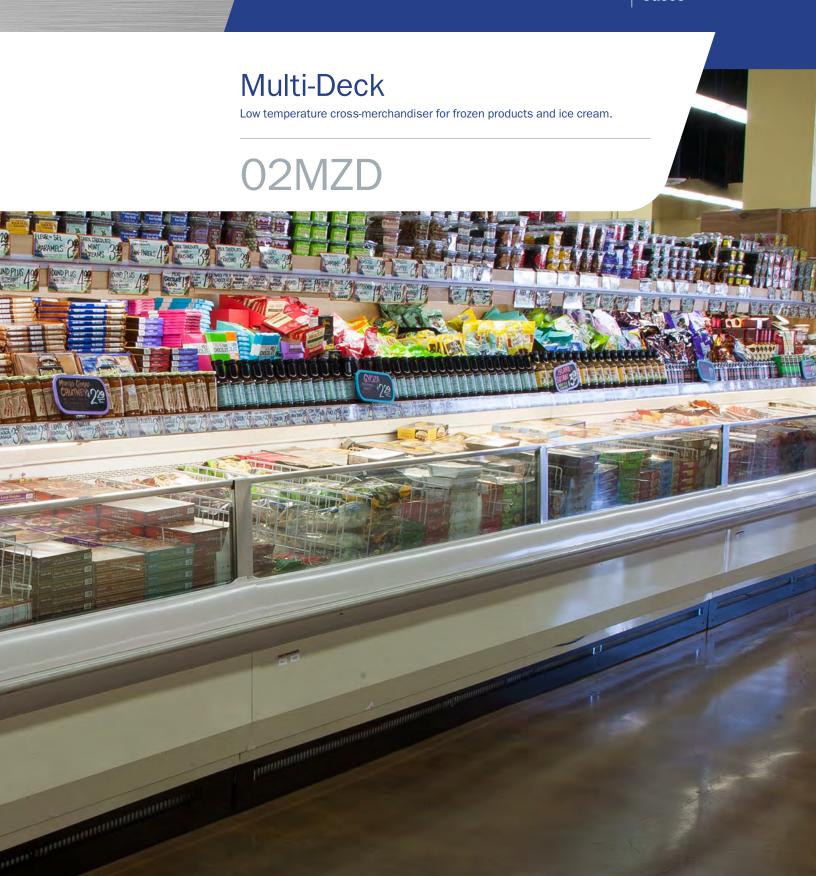

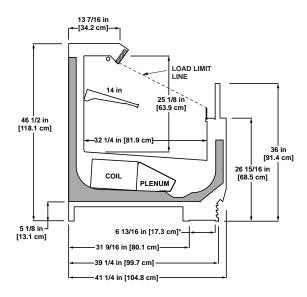

Please consult Hillphoenix Engineering Reference Manual for dimensions, plan views and technical specifications. Specifications subject to change without notice. Designed for optimal performance in store environments where temperature and humidity do not exceed 75°F and 55% R.H. Certified to UL 471 and ANSI/NSF Standard 7.

## **Available Options**

- Available lengths: 4', 6', 8', 12'.
- Multiple front styles available.
- Multiple front sill heights available.
- · Adjustable wire racks provide display flexibility.
- · Custom Colors, Finishes, and Textures available.
- Available in traditional direct expansion as well as secondary coolant versions.

## **Benefits and Features**

- Engineered for uniform merchandiser performance.
- Optimized for increased energy efficiency.
- Bottom mounted copper coil for easy access and serviceabilty.
- Dual-temp option allows frozen and ice cream products to be switched easily.
- Removable castors for easy merchandiser unloading and installation.







Conyers, GA USA 770.285.3264 hillphoenix.com ©2015 Hillphoenix, Inc.