
CHILL

GENERAL NOTES:

- "---" indicates that the feature is not an option for this case model and/or the data is not yet available.
- · LED lights only.
- · Maximum of 3 rows of standard output LED lighted shelves.
- · Nose lights are not available.



SHIPPING WEIGHT			
Case	Weight		
O3.25UMQA-NRG			

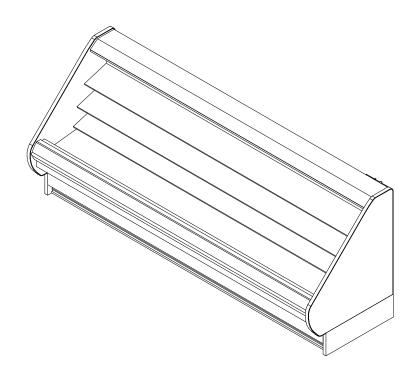





■ COMPONENT

ALL MEASUREMENTS ARE TAKEN PER
ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX
REFRIGERATED DISPLAY CASES FOR SALE IN THE
UNITED STATES MEET OR EXCEED DEPARTMENT
OF EMPENY CASES FOR SALE IN THE OF ENERGY 2017 REQUIREMENTS.

O3.25UMQA-NRG

Rev. Date	Rev. #	Rev. Title
9-30-20	2	SOLOCHILL V5
9-18-19	1	SOLOCHILL V4



A DOVER COMPANY

O3.25UMQA-NRG

ELECTRICAL DATA				
	Fans	High Effci	ency Fans	
Case	Per	120	Volts	
Length	Case	Amps	Watts	
8'	2	0.32	22.0	
12'	3	0.48	33.0	



LIGHTING DATA						
			Clearvoya	nt LED Ligh	nting (Per Li	ght Row)
			Standard	d Power		
			(Cornice	or Shelf)	High Power	r (Cornice)
Case	Lights	Lights	120 \	/olts	120 \	/olts
Length	per row	Length	Amps	Watts	Amps	Watts
8'	2	4'	0.10	11.8	0.25	29.9
12'	3	4'	0.15	17.6	0.37	44.8

DEFROST CONTROLS				
Timed-Off Defrost				
Defrosts Per Dav	Fail-Safe (Min)	Termination Temp (°F)		
6	30	47		

NOTES:

- "---" indicates that the feature is not an option for this case model and/or the data is not yet available.
- · Listed discharge air velocity represents the average velocity immediately after defrost.
- · Temperature and defrost settings listed above are recommended start-up settings. Final operational settings may need to be adjusted for the store conditions in which the case operates.





Rev. Date	Rev.#	Rev. Title
9-30-20	2	SOLOCHILL V5
9-18-19	1	SOLOCHILL V4



O3.25UMQA-NRG



SOLOCHILL DATA		@95° Condensin	g Temperature		
Volts	Phase	Frequency	Wire		
208	1	60	3 Wire + Ground		
Application	on	Case Length	Evaporator Temp (°F)	Discharge Air (°F)	Discharge Air Velocity (FPM)
Dairy/Deli/Cut F	Produce	8'	26	31	150
Dairy/Deli/Cut F	Produce	12'	26	31	150
Meat		8'	24	30	150
Meat		12'	24	30	150

	Case			R4	48A		
Application	Length	Condensing Unit Model	MCA	MOP	Required Capacity	THR (BTUH)	Flow Rate
Dairy/Deli/Cut Produce	8'	DA130	11.9	15	7896	9853	2.8
Dairy/Deli/Cut Produce	12'	DA220	18.9	20	11844	14458	4.1
Meat	8'	DA130	11.9	15	7808	9935	2.8
Meat	12'	DA220	18.9	20	11712	14563	4.2

NOTES:



O3.25UMQA-NRG

Rev. Date	Rev.#	Rev. Title
9-30-20	2	SOLOCHILL V5
9-18-19	1	SOLOCHILL V4




^{*} SoloChill CDU is remote mount only.

O3.25UMQA-NRG

NOTES:

SOLOCHILL

- · Front and rear sill heights vary with base frame height.
- Extended front sills are required for meat applications to maintain proper product temperature. An extended front has a minimum height of 24" on a 5" baseframe, or 30" on an 11" baseframe.

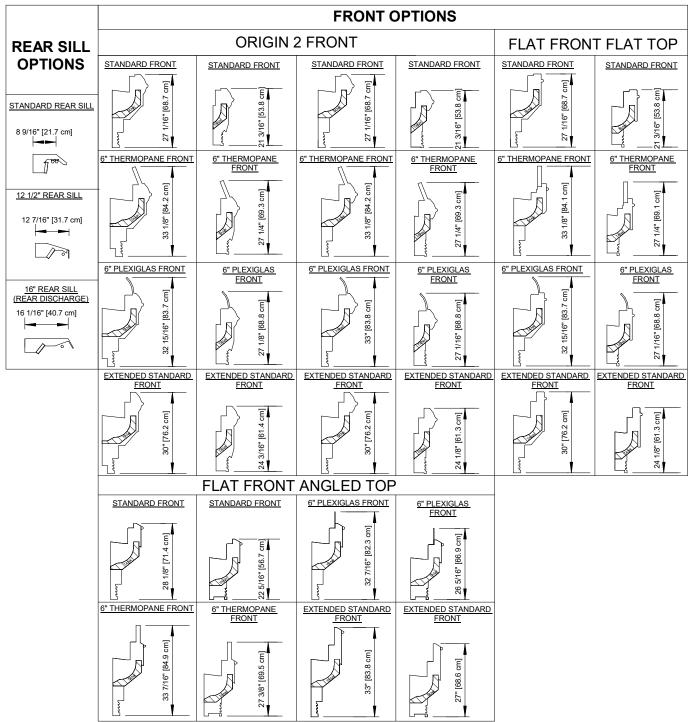







COMPONENT

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.


O3.25UMQA-NRG


Rev. Date	Rev.#	Rev. Title
9-30-20	2	SOLOCHILL V5
9-18-19	1	SOLOCHILL V4




A DOVER COMPANY







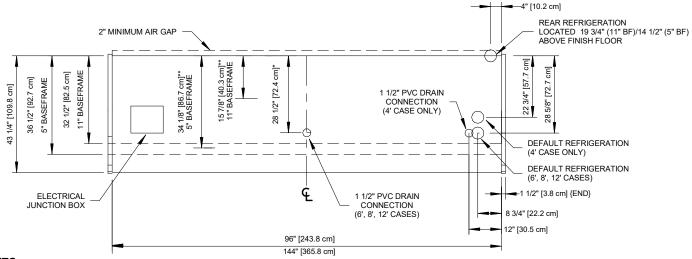

NOTES:

- * : STUB-UP AREA
- **: RECOMMENDED STUB-UP CENTERLINE FOR ELECTRICAL AND HUB DRAINS
- ①: AVAILABLE SHELF SIZES: 10", 12", 14", 16", 18", 20" & 22"
- · Ends add approximately 1 inch to case height.
- Product on top shelf should be 3 inches below discharge.



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

O3.25UMQA-NRG

Rev. Date	Rev.#	Rev. Title
9-30-20	2	SOLOCHILL V5
9-18-19	1	SOLOCHILL V4



A DOVER COMPANY