


CF-SC (SFC)

Self-Service Open Multi-Deck Merchandiser
4' (Bakery/Beverage/Dairy/Deli)



GENERAL NOTES:

- "---" Indicates that the feature is not an option on this case model and/or the data is not yet available at this time.
- (SFC) - Small Format Channel

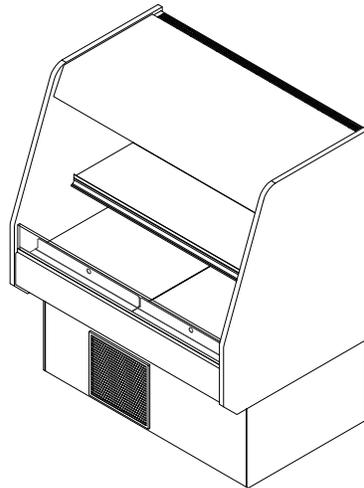

SHIPPING WEIGHT	
Case	Weight
CF-SC (SFC)	---



CF-SC (SFC)

Rev. Date	Rev. #	Rev. Title
06-18-21	1	NEW STANDARDS



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.



SYSTEM REQUIREMENTS			
Volts	Phase	Minimum Circuit Ampacity	Maximum Overcurrent Protection
120	1	12.0	20.4
120/208	1	10.5	18.9

ELECTRICAL DATA				
Fans Per Case	High Efficiency Fans		Anti-Condensate Heaters	
	120 Volts		120 Volts	
	Amps	Watts	Amps	Watts
2	0.60	25	.08	9

LIGHTING DATA					
Lights Per Row	Light Length	Clearvoyant 4 LED Lighting (Per Light Row)			
		Standard Power (Cornice or Shelf)		High Power (Cornice)	
		120 Volts		120 Volts	
		Amps	Watts	Amps	Watts
1	4'	0.05	5.9	0.12	14.9

GUIDELINES AND CONTROL SETTINGS		
24hr Energy Usage (kWh/ft)	Discharge Air (°F)	Discharge Air Velocity (FPM)
10.3	26	140

CONDENSING UNIT DATA								
Volts	Phase	HP	RLA (Amps)	LRA (Amps)	Refrig.	Grams	Condenser Fans	
							Amps	Watts
120	1	---	8.4	41.5	R290	136	0.53	30

DEFROST CONTROLS							
Defrosts Per Day	Run-Off Time (Min)	Electric Defrost		Timed-Off Defrost		Hot Gas Defrost	
		Fail-Safe (Min)	Termination Temp (°F)	Fail-Safe (Min)	Termination Temp (°F)	Fail-Safe (Min)	Termination Temp (°F)
6	---	---	---	30	45	---	---

NOTES:

- "----" Indicates that the feature is not an option on this case model and/or the data is not yet available at this time.
- Listed discharge air velocity represents the average velocity at the peak of defrost.
- LRA - Locked Rotor Amps
- RLA - Running Load Amps



CF-SC (SFC)



Rev. Date	Rev. #	Rev. Title
06-18-21	1	NEW STANDARDS



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

CF-SC (SFC)

Self-Service Open Multi-Deck Merchandiser
4' (Bakery/Beverage/Dairy/Deli)

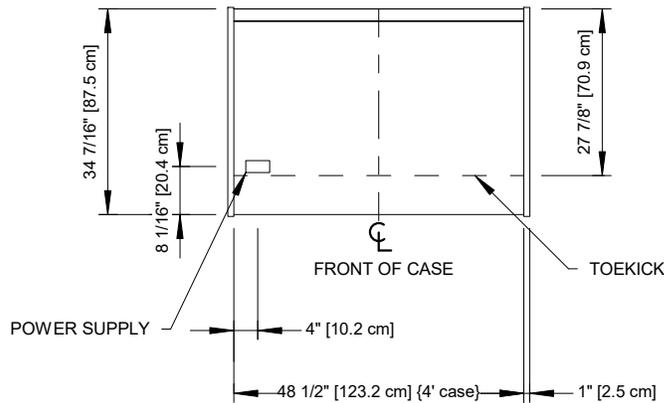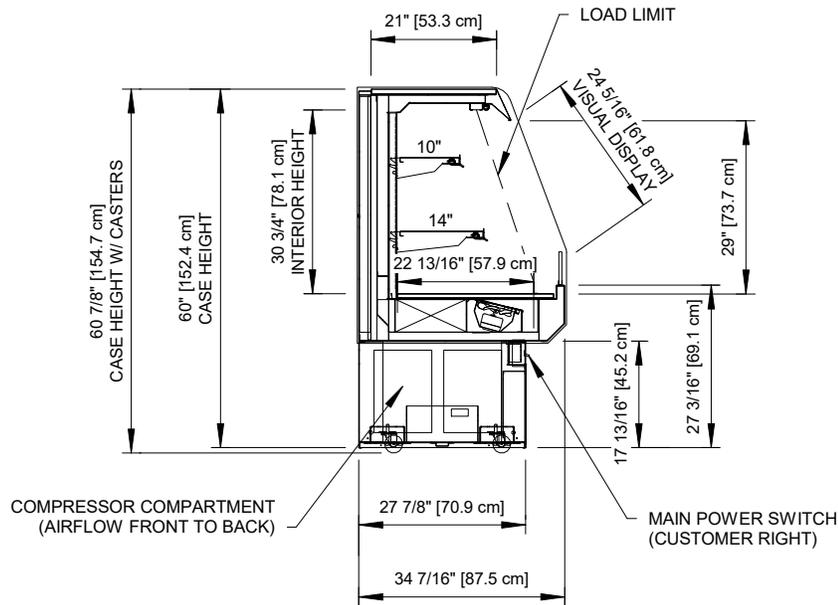

CF-SC (SFC)

Rev. Date	Rev. #	Rev. Title
06-18-21	1	NEW STANDARDS



a DOVER company

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.